


Manufacturer Aamsco
Model LED 6WBT HYBRID DIM22K
Description Candelabra
Driver Integrated
Nominal Power (W) 6
Dimming Control Forward and Reverse Phase
Product Range -
Test Date - 11/15/217

Dimmer Tested Against:	SDM12-EM	SCP	UDM-FWD	UDM-REV	UDS-F	UDS-R
Pass/Fail	Pass	Pass	Pass	Pass	Pass	Pass
Best-Fit Power Profile:						
Minimum ON	20	25	20	25	25	20
Maximum ON	72	77	78	77	82	73
Adjust	100	100	100	100	100	100
Light Output Range (vs. non-dimmed)						
Maximum (Perceived), 120V	95.5%	95.1%	95.0%	95.4%	95.5%	95.3%
Minimum (Perceived)	36.6%	42.2%	34.0%	39.9%	33.2%	40.5%
Minimum (Measured)	13.4%	17.8%	11.5%	15.9%	11.0%	16.4%

Linearity Curves (Best-fit Power Profile Applied):

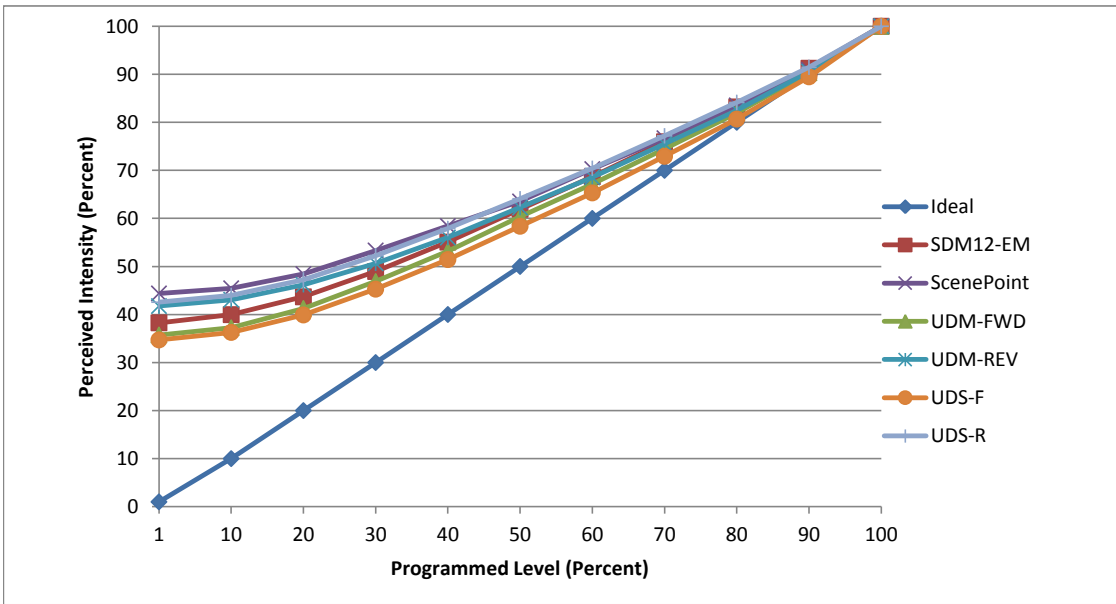

Observations:

bgk