


**Manufacturer** GE  
**Model** LED7XDMR16D82725  
**Description** MR16 lamp, low-voltage  
**Driver/transformer** 50VA Magnetic transformer  
**Nominal Power (W)** 7  
**Dimming Control** forward-phase (transformer-dependent)  
**Product Range** energy smart  
**Test Date** 4/16/2015

Dimmer Tested Against:	<b>SDM12-EM</b>		
Pass/Fail	pass		
<b>Best-Fit Power Profile:</b>			
Minimum ON	1.5		
Maximum ON	60		
Adjust	100		
<b>Light Output Range (vs. non-dimmed)</b>			
Maximum (Perceived), 120V	95.3%		
Minimum (Perceived)	10.7%		
Minimum (Measured)	1.1%		

**Linearity Curves (Best-fit Power Profile Applied):**

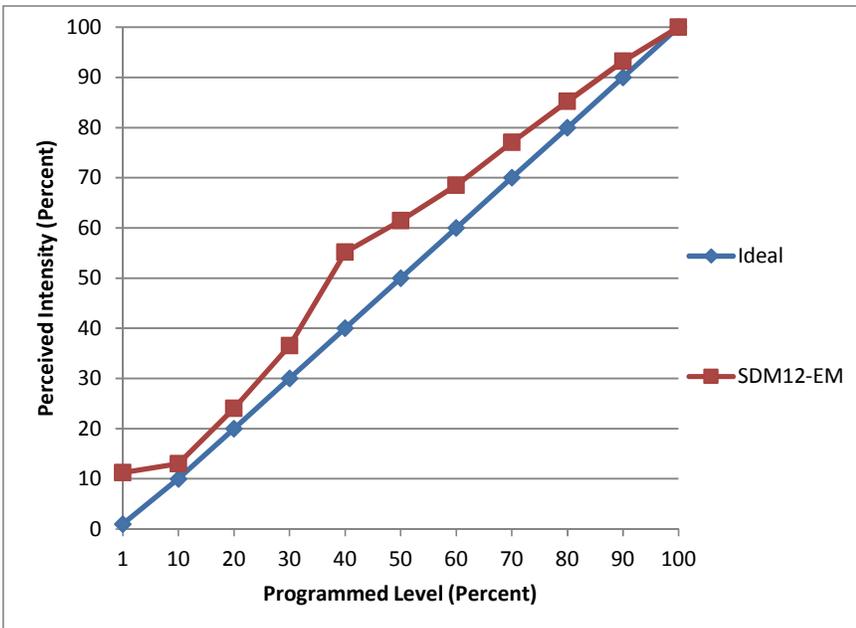

**Observations:**

When initially turned on to low level (up to 30%), there is an initial state of high brightness followed by settling to constant, unflickering level.