



**Manufacturer** Auroralight  
**Model** HSL16-BR-60-YLEDMOD7M29  
**Description** Telluride Outdoor Spot Light  
**Driver** Integrated  
**Nominal Power (W)** 7.5  
**Dimming Control** Forward phase. See Observations  
**Product Range**  
**Test Date** 2/12/2014

Dimmer Tested Against:	SDM12-EM	DRD4	
Pass/Fail	Pass	N/A	
<b>Best-Fit Power Profile:</b>			
Minimum ON	4		
Maximum ON	85		
Adjust	100		
<b>Light Output Range (vs. non-dimmed)</b>			
Maximum (Perceived), 120V	95.2%	100.0%	
Minimum (Perceived)	29.3%	1.0%	
Minimum (Measured)	8.6%	0.0%	


**Forward-phase**  
 100% Dim Level Waveform Capture

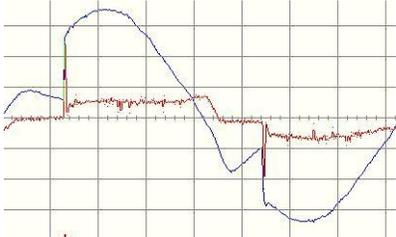

50% Dim Level Waveform Capture

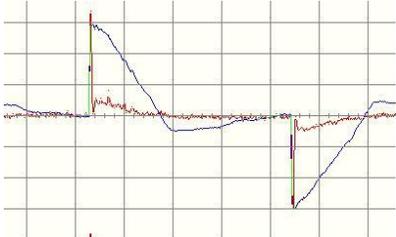

Linearity Curves (Best-fit Power Profile Applied):

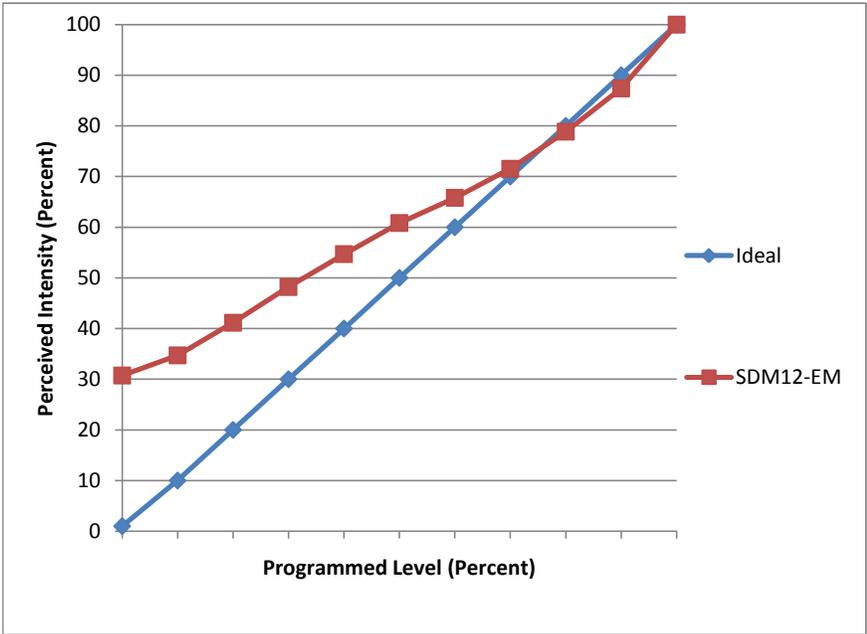

**Observations:** Not tested against DRD4 this is an outdoor application.  
 Phase-control, dependent upon transformer. Tested against magnetic transformer.