


**Manufacturer** Soraa  
**Model** MR16-36-B01-12-930-25  
**Description** LED MR16  
**Driver** Internal  
**Nominal Power (W)** 9.5  
**Dimming Control** Forward-phase (Juno 5201) and Reverse-phase (Ambiance 9454-12 transformer)  
**Product Range** Vivid  
**Test Date** 12/13/2012

Dimmer Tested Against:	SDM12-EM	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Standard
Minimum ON	0	2	
Maximum ON	80	80	
Adjust	100	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.0%	96.3%	100.0%
Minimum (Perceived)	10.9%	23.0%	9.9%
Minimum (Measured)	1.2%	5.3%	1.0%

Linearity Curves (Best-fit Power Profile Applied):

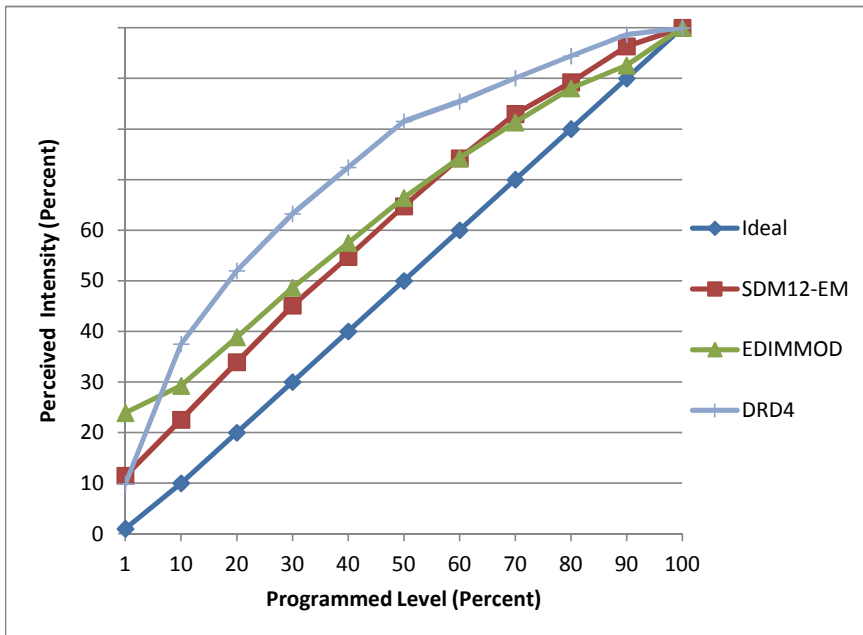

**Observations:** Results may vary depending on transformer.

**Forward-phase**

100% Dim Level Waveform Capture




50% Dim Level Waveform Capture



**Reverse-phase**

100% Dim Level Waveform Capture

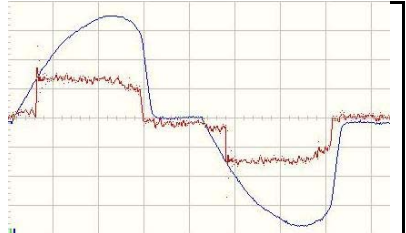

50% Dim Level Waveform Capture

