


Manufacturer Bridgelux
Model 30G4000F
Description Downlight
Driver Hatch XRC21-0450P-UNV-A
Nominal Power (W) 12
Dimming Control Forward and Reverse
Product Range -
Test Date 6/28/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	9	9	9	9
Maximum ON	46	48	49	42
Adjust	100	100	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.9%	95.3%	95.0%	95.0%
Minimum (Perceived)	36.6%	32.7%	34.0%	41.0%
Minimum (Measured)	13.4%	10.7%	11.6%	16.8%

Linearity Curves (Best-fit Power Profile Applied):

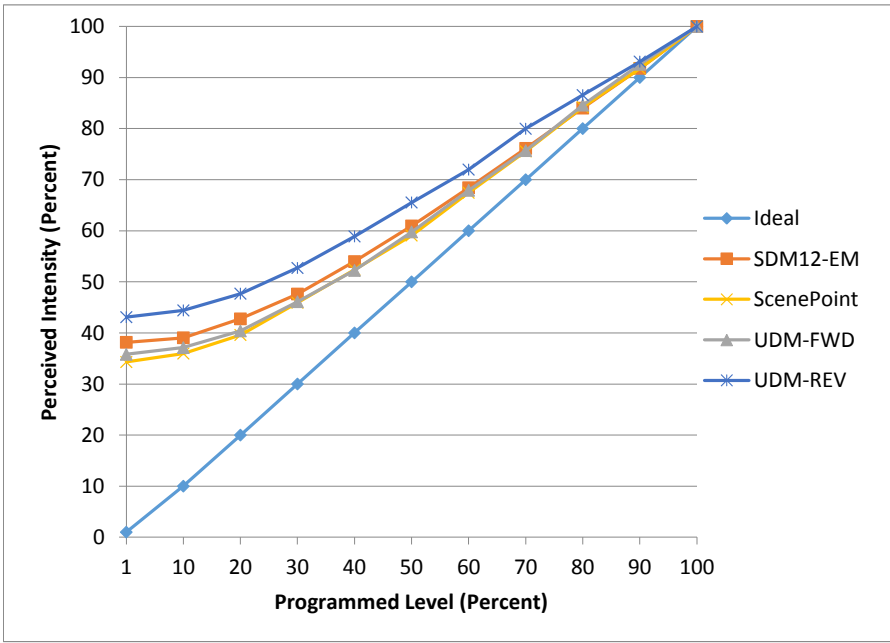

Observations:

bgk