Manufacturer CREE Model ECO4-575L

Description 4" LED Recessed Light with Integrated Trim

Driver Integrated

Nominal Power (W) 9.5


forward- and reverse-phase **Dimming Control**

Product Range

Test Date 6/3/2013


Dimmer Tested Against:	SDM12-EM	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Standard
Minimum ON	2	2	
Maximum ON	67	75	
Adjust	20	40	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.8%	97.3%	100.0%
Minimum (Perceived)	7.2%	6.1%	4.7%
Minimum (Measured)	0.5%	0.4%	0.2%


Linearity Curves (Best-fit Power Profile Applied):

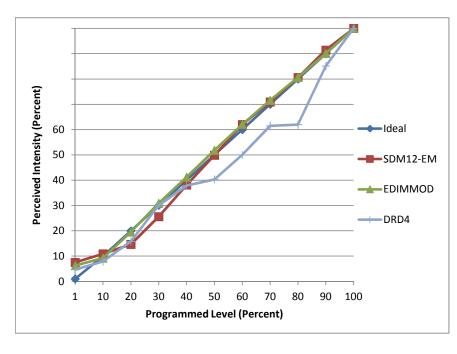


Observations: None

Forward-phase






50% Dim Level Waveform Capture



Reverse-phase

100% Dim Level Waveform Capture



50% Dim Level Waveform Capture

