


Manufacturer Nora Lighting
Model NLCBC-451D30HZW
Description 4" LED Retrofit trim
Driver EBRO20U-0400-42
Nominal Power (W) 16
Dimming Control Forward and *Reverse
Product Range Cobalt
Test Date 2/12/2016

Dimmer Tested Against:	SDM12-EM	EDIMMOD	ScenePoint
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			
Minimum ON	2	2	2
Maximum ON	72	65	72
Adjust	100	100	100
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.2%	96.3%	95.0%
Minimum (Perceived)	15.7%	26.8%	14.4%
Minimum (Measured)	2.5%	7.2%	2.1%

Linearity Curves (Best-fit Power Profile Applied):

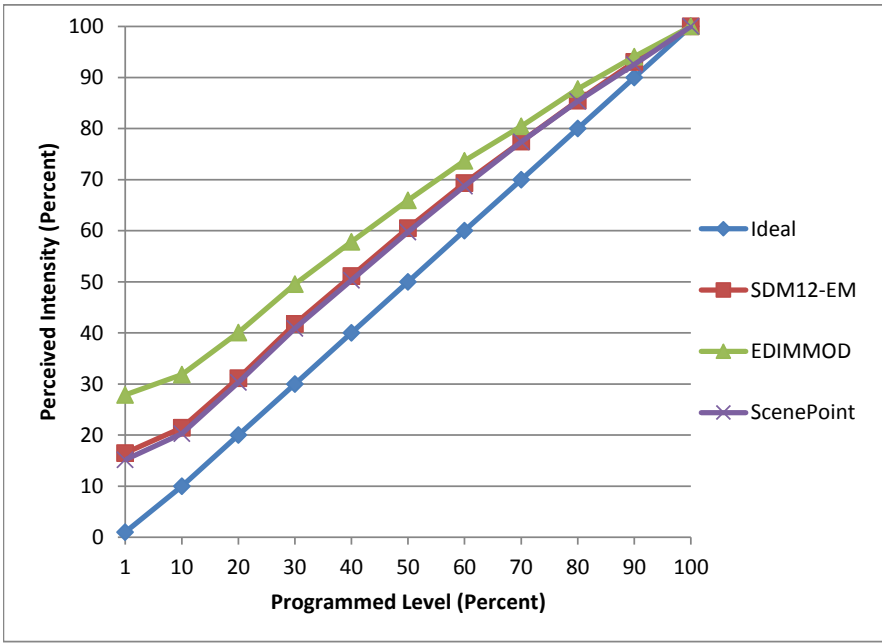

Observations:

* Driver states "Suitable for operation with a TRIAC dimmer", not mentioning ELV, but it seems to operate with ELV without apparent issue.