


**Manufacturer** Progress Lighting  
**Model** P8026-28QL/35K  
**Description** 4" Downlight Open Trim, Everlume  
**Driver** Brillia BL26-120-DIM-340  
**Nominal Power (W)** 15W  
**Dimming Control** Line-voltage, reverse-phase  
**Product Range**  
**Test Date** 9/29/2010

Dimmer Tested Against:	<b>EDIMMOD</b>		
Pass/Fail	Pass		
<b>Best-Fit Power Profile:</b>			
Minimum ON	2		
Maximum ON	75		
Adjust	100		
<b>Light Output Range (vs. non-dimmed)</b>			
Maximum (Perceived)	97.6%		
Minimum (Perceived)	26.9%		
Minimum (Measured)	0.0%		

**Linearity Curves (Best-fit Power Profile Applied):**

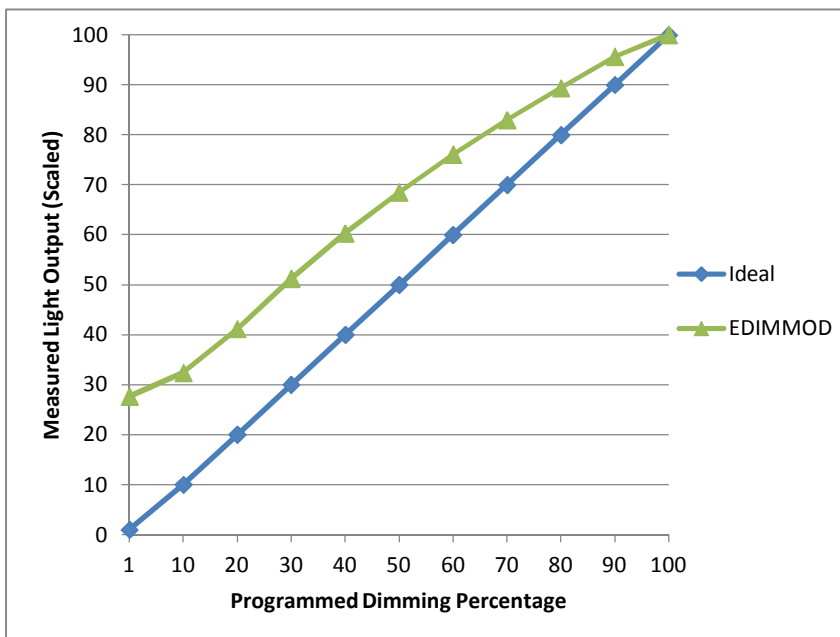

**Observations:**

Test conducted with forward-phase dimmer - causes fixture to buzz.