


Manufacturer DASAL Architectural Lighting
Model DLD-I/C-Q-7S-120
Description IC-Rated Downlight
Driver ROAL TROPO RLDD0915L-700
Nominal Power (W) 14
Dimming Control Forward- and Reverse-phase
Product Range Quadra Xicato I/C
Test Date 9/16/2014

Dimmer Tested Against:	SDM12-EM	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Standard
Minimum ON	3	7	
Maximum ON	82	75	
Adjust	100	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	96.0%	95.5%	100.0%
Minimum (Perceived)	16.9%	39.8%	22.0%
Minimum (Measured)	2.8%	15.8%	4.9%

Linearity Curves (Best-fit Power Profile Applied):

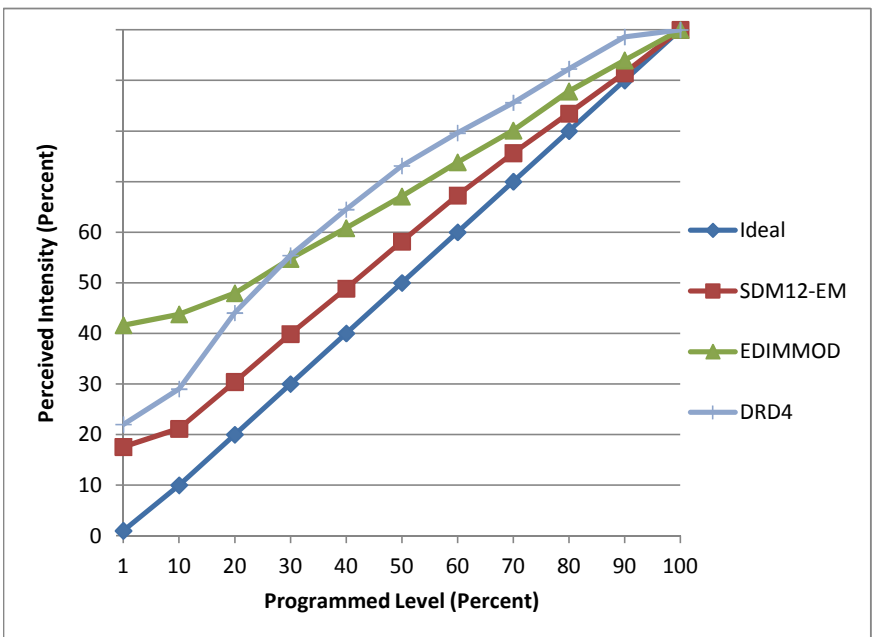

Observations:

DRD4 Minimum reliable on: 6% (no low-end trim)
 No minimum load issues on RFLC nor ScenePoint.