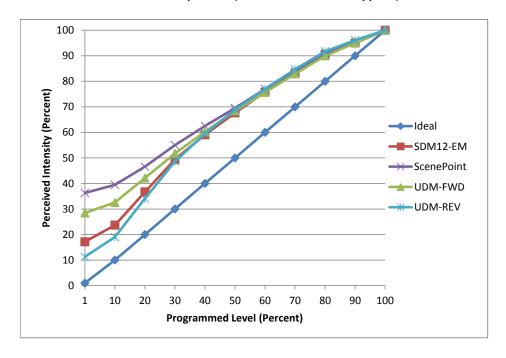|	
Manufacturer	FEIT
Model	CEBR30/5K/LED/8
Description	BR30 Lamp
Driver	Integrated
Nominal Power (W)	9.5
Dimming Control	Forward and Reverse
Product Range	-
Test Date	3/15/2016

Dimmer Tested Against:	MDS8RW101	ScenePoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	3	7	5	3
Maximum ON	90	90	89	89
Adjust	100	100	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.0%	95.3%	94.9%	95.1%
Minimum (Perceived)	16.3%	34.6%	27.0%	10.7%
Minimum (Measured)	2.7%	12.0%	7.3%	1.1%

Linearity Curves (Best-fit Power Profile Applied):

Observations:

bgk