ManufacturerHaloModelEL405827


Description4" LED DownlightDriverRHPS311EL-CLONominal Power (W)15

Dimming ControlForward- and Reverse-phaseProduct RangeHalo downlight fixture H456ICAT

Test Date 12/19/2012

Dimmer Tested Against:	SDM12-EM	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Standard
Minimum ON	2	2	2
Maximum ON	65	60	
Adjust	100	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	96.8%	96.5%	100.0%
Minimum (Perceived)	16.6%	28.6%	9.5%
Minimum (Measured)	2.7%	8.2%	0.9%


Linearity Curves (Best-fit Power Profile Applied):

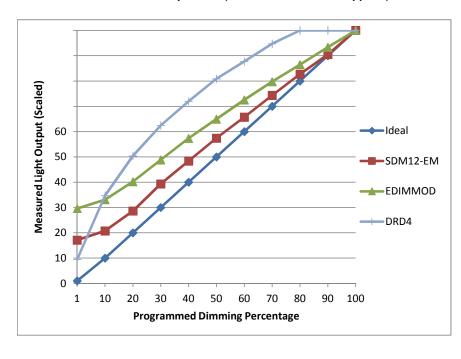

Observations: None

Forward-phase





50% Dim Level Waveform Capture



Reverse-phase

100% Dim Level Waveform Capture



50% Dim Level Waveform Capture

