


Manufacturer Green Creative
Model BR30 E26 8W 2700K
Description BR30 Lamp
Driver Integrated
Nominal Power (W) 8
Dimming Control Forward and Reverse
Product Range -
Test Date 5/3/2017

Dimmer Tested Against:	SDM12-EM	Scenepoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	3	3	2	3
Maximum ON	93	95	95	92
Adjust	100	100	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.1%	95.2%	95.4%	95.3%
Minimum (Perceived)	25.3%	23.0%	18.2%	23.0%
Minimum (Measured)	6.4%	5.3%	3.3%	5.3%

Linearity Curves (Best-fit Power Profile Applied):

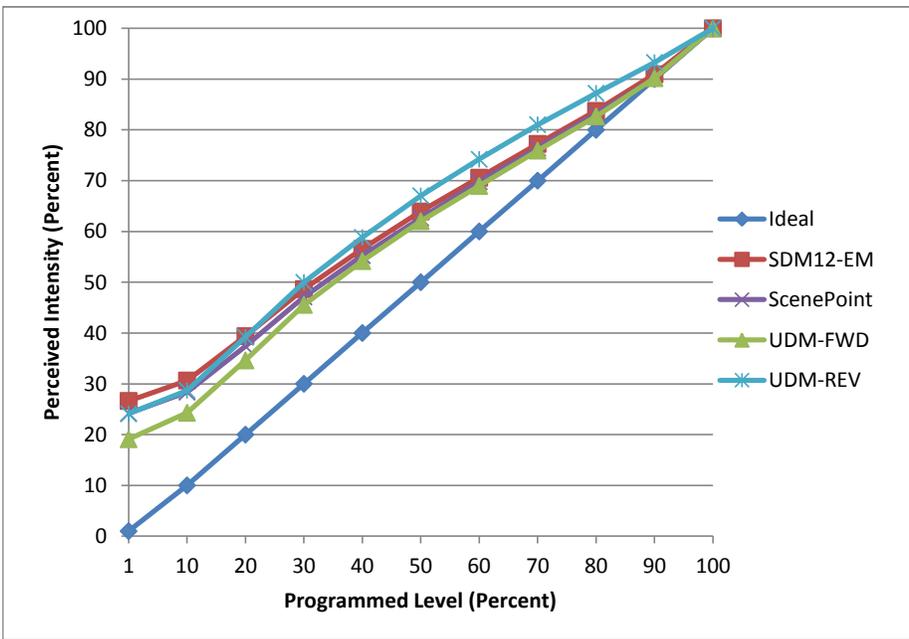

Observations:

bgk