


Manufacturer Halo
Model RL560WH-R
Description 5 - 6" LED Retrofit Baffle Trim
Driver Integral
Nominal Power (W) 9.4
Dimming Control Line Voltage, Forward- and Reverse-Phase
Product Range
Test Date 5/20/2013


Dimmer Tested Against:	SDM12-EM	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Standard
Minimum ON	1	2.5	3
Maximum ON	72	65	
Adjust	100	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	96.1%	97.2%	100.0%
Minimum (Perceived)	7.8%	29.5%	6.8%
Minimum (Measured)	0.6%	8.7%	0.5%

Linearity Curves (Best-fit Power Profile Applied):

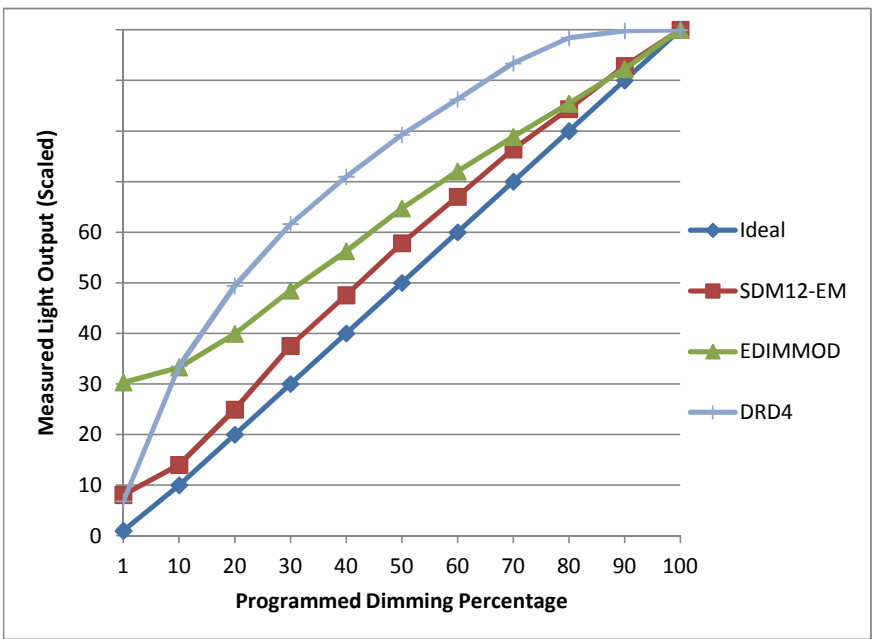


Observations:
 Minimum on for DRD: 2%

Forward-phase
100% Dim Level Waveform Capture

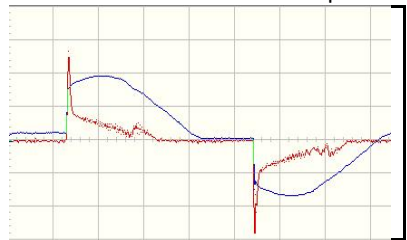

50% Dim Level Waveform Capture

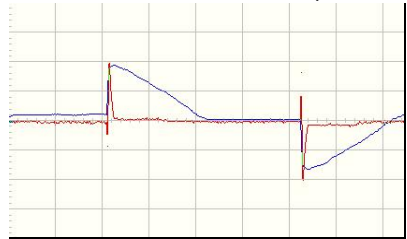

Reverse-phase
100% Dim Level Waveform Capture



50% Dim Level Waveform Capture

