


Manufacturer Intertek
Model CER6730WH
Description 5" - 6" Recessed Can LED Conversion
Driver CDL model CDLPS388R12 (attached)
Nominal Power (W) 15
Dimming Control
Product Range
Test Date 5/10/2013

| Dimmer Tested Against: | SDM12-EM | EDIMMOD | DRD4 |
|-------------------------------------|----------|---------|----------|
| Pass/Fail | Pass | Pass | Pass |
| Best-Fit Power Profile: | | | Standard |
| Minimum ON | 2 | 1 | |
| Maximum ON | 65 | 60 | |
| Adjust | 100 | 100 | |
| Light Output Range (vs. non-dimmed) | | | |
| Maximum (Perceived) | 97.4% | 97.8% | 100.0% |
| Minimum (Perceived) | 12.0% | 13.4% | 9.5% |
| Minimum (Measured) | 1.4% | 1.8% | 0.9% |

Linearity Curves (Best-fit Power Profile Applied):

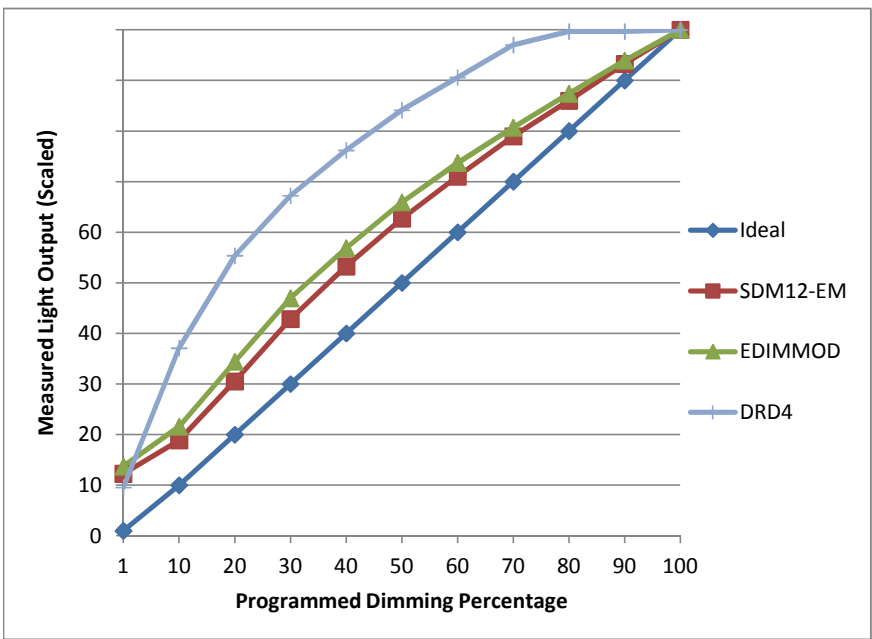


Observations:

DRD4 minimum reliable on level is 3%.

Forward-phase

100% Dim Level Waveform Capture

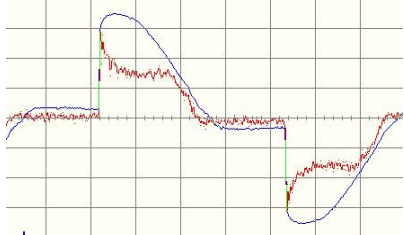


50% Dim Level Waveform Capture



Reverse-phase

100% Dim Level Waveform Capture

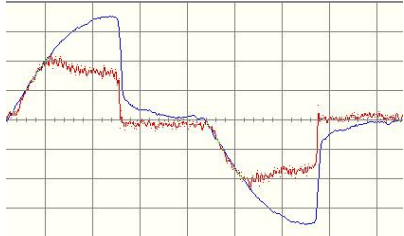

50% Dim Level Waveform Capture

