


**Manufacturer** TCP  
**Model** LED10B30D  
**Description** BR30 Lamp  
**Driver** Integrated  
**Nominal Power (W)** 10  
**Dimming Control** Forward-phase  
**Product Range**  
**Test Date** 8/18/2014

Dimmer Tested Against:	<b>SDM12-EM</b>	<b>DRD4</b>	
Pass/Fail	Pass	?	
Best-Fit Power Profile:		Standard	
Minimum ON	5		
Maximum ON	75		
Adjust	75		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived), 120V	96.1%	100.0%	
Minimum (Perceived)	4.3%	2.8%	
Minimum (Measured)	0.2%	0.1%	

**Linearity Curves (Best-fit Power Profile Applied):**

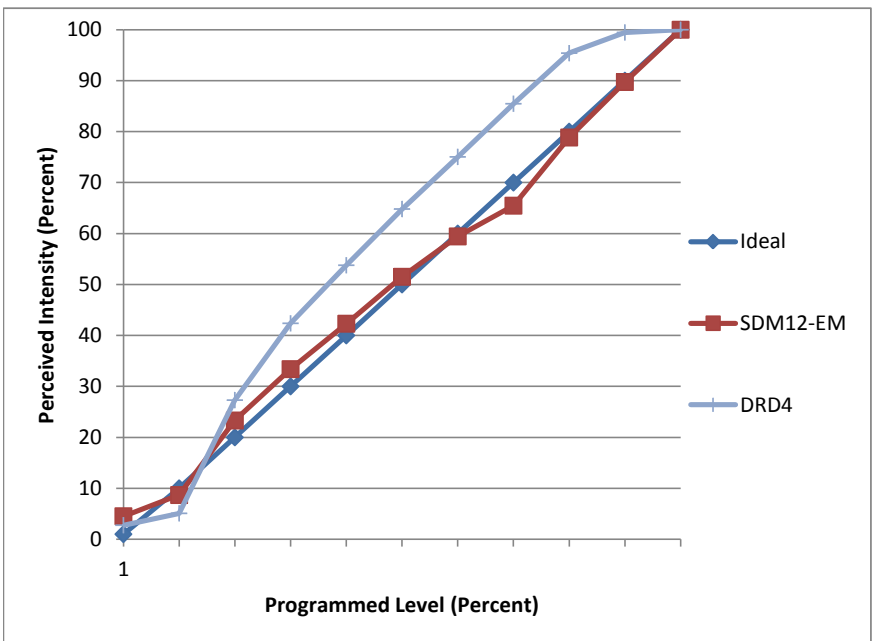

**Observations:**

DRD4 Minimum on 4%  
 DRD4 requires more than one lamp on load.  
 There is some inconsistency of brightness at about 20% programmed dim level:  
 If off and turned on to 20%, brightness is less than when already on and reduced to 20%.