


Manufacturer Liteline
Model G4-B11LED5W-27K-ES
Description Candelabra
Driver Integrated
Nominal Power (W) 5
Dimming Control Forward and Reverse
Product Range
Test Date 5/12/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	1	1	1	1
Maximum ON	94	95	95	52
Adjust	100	100	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.4%	95.4%	95.4%	95.2%
Minimum (Perceived)	19.4%	16.2%	17.9%	17.2%
Minimum (Measured)	3.8%	2.6%	3.2%	3.0%

Linearity Curves (Best-fit Power Profile Applied):

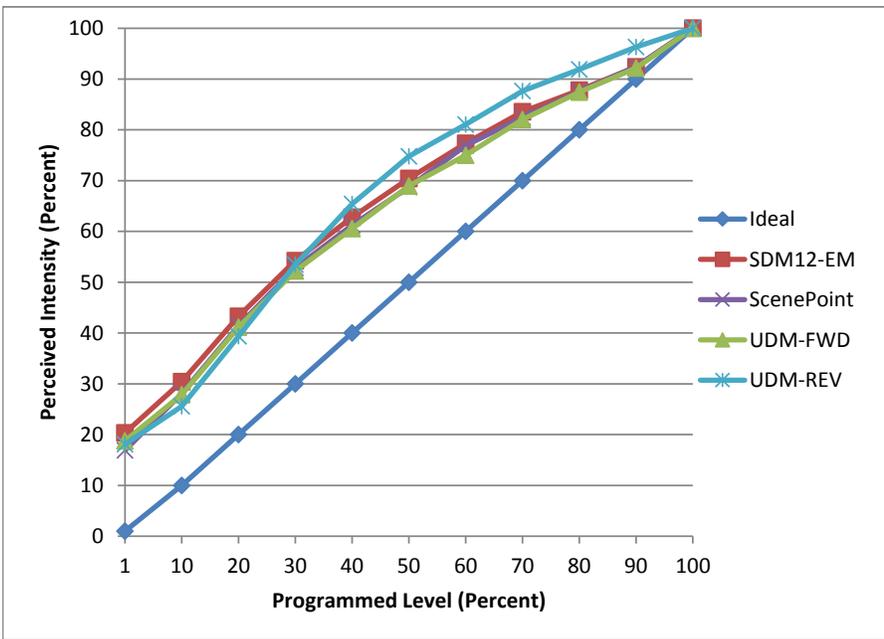

Observations:

bgk