


Manufacturer Liteline
Model G4-MR16LED6W-30K-ES
Description MR16 Lamp
Driver Juno IC44N
Nominal Power (W) 6
Dimming Control Forward
Product Range
Test Date 5/31/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD
Pass/Fail	Fail	Fail	Pass
Best-Fit Power Profile:			
Minimum ON	19	16	1
Maximum ON	-	-	17
Adjust	-	-	100
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.0%	95.0%	95.5%
Minimum (Perceived)	1.0%	1.0%	12.8%
Minimum (Measured)	0.0%	0.0%	1.6%

Linearity Curves (Best-fit Power Profile Applied):

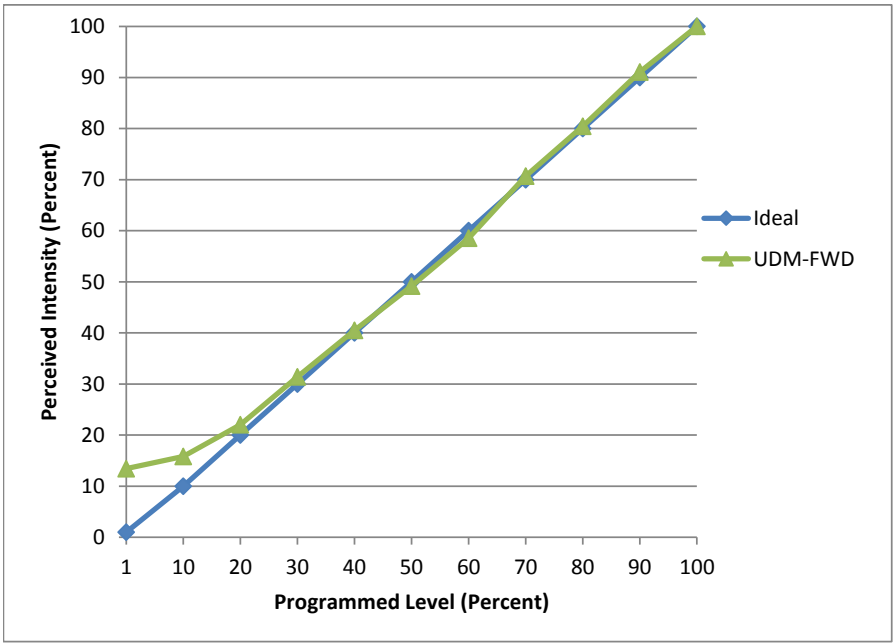

Observations:

Minimum Load Issue

bgk