


**Manufacturer** Liteline  
**Model** G4-P16LED6W-30KFL-ES  
**Description** Par 16 Lamp  
**Driver** Integrated  
**Nominal Power (W)** 6  
**Dimming Control** Forward and Reverse  
**Product Range**  
**Test Date** 4/28/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
<b>Best-Fit Power Profile:</b>				
Minimum ON	1	1	1	1
Maximum ON	95.5	95.5	96	60
Adjust	100	100	100	100
<b>Light Output Range (vs. non-dimmed)</b>				
Maximum (Perceived)	95.6%	95.2%	95.5%	95.0%
Minimum (Perceived)	13.0%	10.9%	14.4%	18.4%
Minimum (Measured)	1.7%	1.2%	2.1%	3.4%

**Linearity Curves (Best-fit Power Profile Applied):**

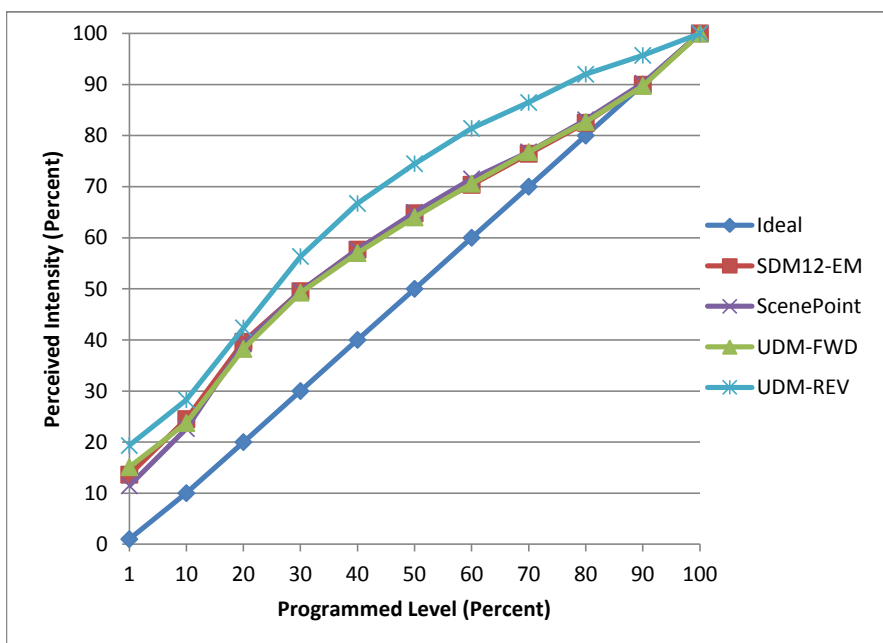

**Observations:**

Scenepoint minimum load is 3 lamps

bgk