


Manufacturer Liteline
Model G4- P16LED7W-30KFL-ES
Description Par 16 Lamp
Driver Integrated
Nominal Power (W) 7
Dimming Control Forward and Reverse
Product Range
Test Date 4/28/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	1	3	1	1
Maximum ON	95	93	95	62
Adjust	100	100	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.1%	95.1%	95.1%	95.1%
Minimum (Perceived)	5.3%	23.0%	1.4%	0.8%
Minimum (Measured)	0.3%	5.3%	0.0%	0.0%

Linearity Curves (Best-fit Power Profile Applied):

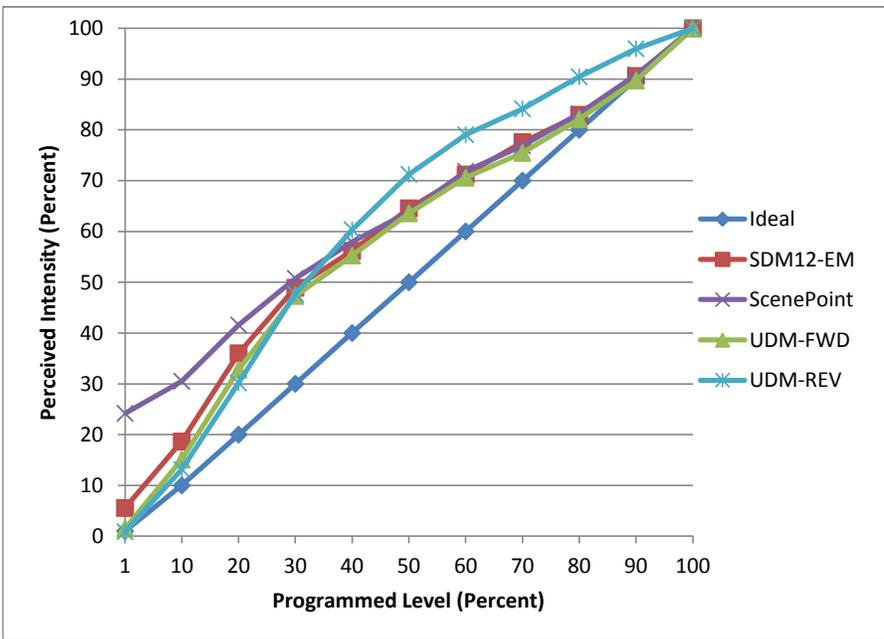

Observations:

bgk