


Manufacturer Liteline
Model MLED1-2SN30-24H-AL
Description Square Puck Light
Driver Lutron HWB-DIM-MDC-24V-40W
Nominal Power (W) 2
Dimming Control Forward
Product Range
Test Date 5/17/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD
Pass/Fail	Fail	Fail	Pass
Best-Fit Power Profile:			
Minimum ON	-	-	4
Maximum ON	-	-	79
Adjust	-	-	100
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.0%	95.0%	95.0%
Minimum (Perceived)	1.0%	1.0%	14.8%
Minimum (Measured)	0.0%	0.0%	2.2%

Linearity Curves (Best-fit Power Profile Applied):

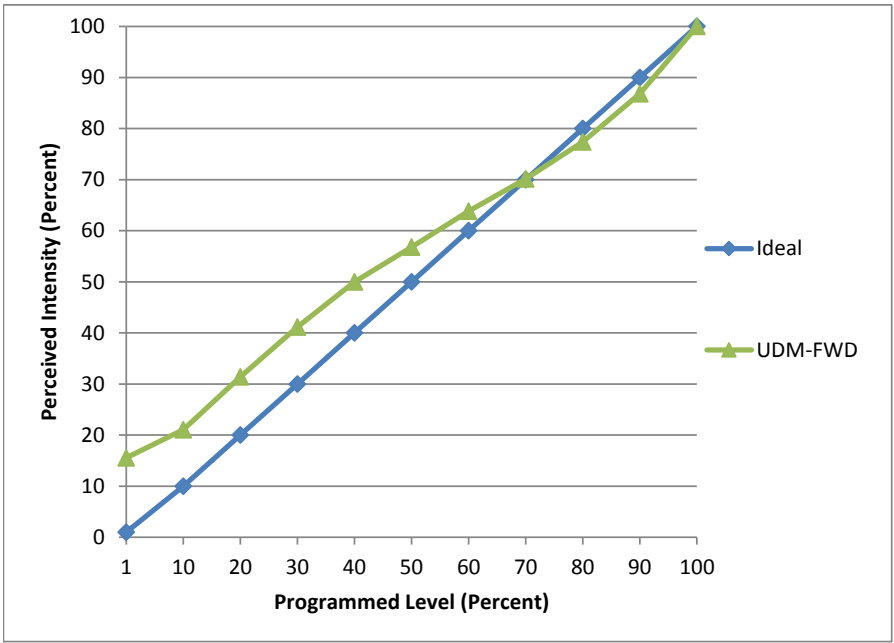

Observations:

Minimum load issue on for the transformer.
 SDM and SP did not function correctly due this issue. UDM fine

bgk