


Manufacturer Liteline
Model P16LED6W-30K-WH
Description Par 16 Lamp
Driver Integrated
Nominal Power (W) 6
Dimming Control Forward and Reverse
Product Range
Test Date 4/28/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	12	14	15	9
Maximum ON	92	92	92	62
Adjust	100	100	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.6%	95.8%	95.0%	95.0%
Minimum (Perceived)	6.4%	6.3%	9.5%	11.6%
Minimum (Measured)	0.4%	0.4%	0.9%	1.4%

Linearity Curves (Best-fit Power Profile Applied):

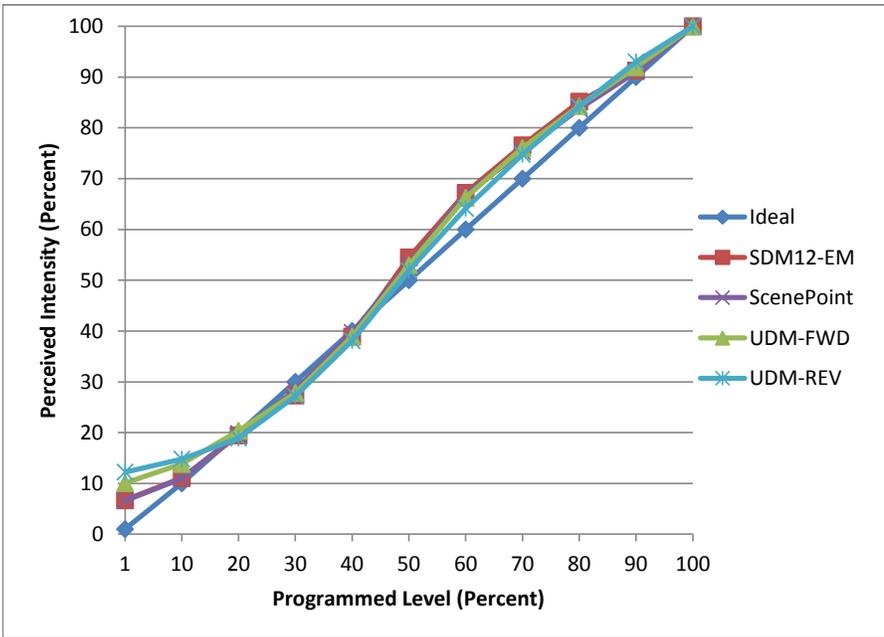

Observations:

Minimum load for SDM and Scenepoint is 2 lamps
 Minimum load for UDM-FWD is 3 lamps
 No issues for UDM-Rev
 Recommend Reverse phase

bgk