


**Manufacturer**      Liton  
**Model**                LD3001-30E10-25  
**Description**        Multi-use LED Lighting Module  
**Driver**                LD514C050-10-DLV-LTN  
**Nominal Power (W)**        15  
**Dimming Control**    Line-voltage, reverse-phase  
**Product Range**        LHLD4 10C50-DLV, LHLD5 10C50-DLV, LHLD6 10C50-DLV, LTD80 10  
**Test Date**             12/16/2010

|  |                |  |  |
|--|----------------|--|--|
| Dimmer Tested Against:                     | <b>EDIMMOD</b> |  |  |
| Pass/Fail                                  | Pass           |  |  |
| <b>Best-Fit Power Profile:</b>             |                |  |  |
| Minimum ON                                 | 1              |  |  |
| Maximum ON                                 | 85             |  |  |
| Adjust                                     | 100            |  |  |
| <b>Light Output Range (vs. non-dimmed)</b> |                |  |  |
| Maximum (Perceived)                        | 95.7%          |  |  |
| Minimum (Perceived)                        | 25.5%          |  |  |
| Minimum (Measured)                         | 0.0%           |  |  |

**Linearity Curves (Best-fit Power Profile Applied):**

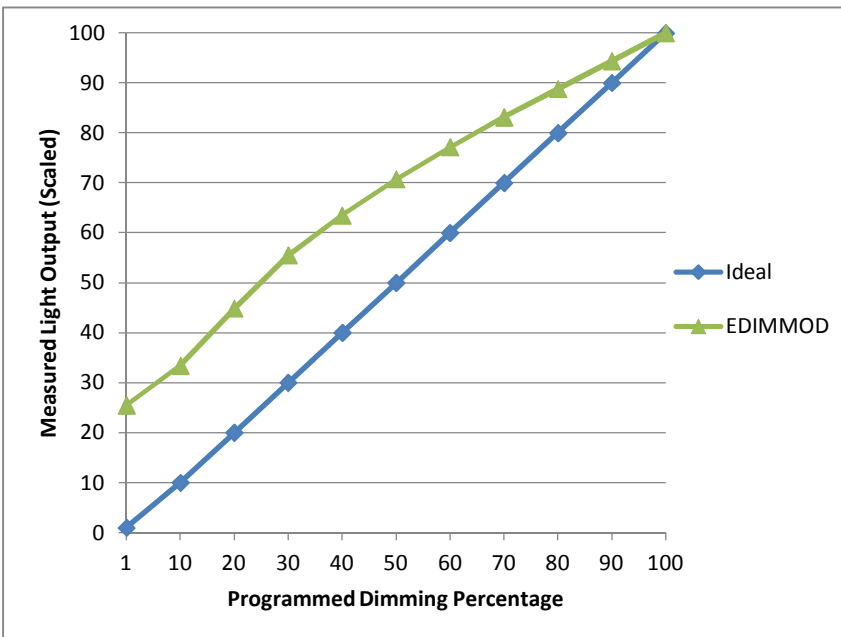

**Observations:**

There is a short delay (~1-3s) to turn-on at low end.