


Manufacturer Liton
Model LD3001-30E10-25
Description Multi-use LED Lighting Module
Driver LD514C070-15-DLV-LTN
Nominal Power (W) 15
Dimming Control Line-voltage, reverse-phase
Product Range LHLD4 15C70-DLV, LHLD5 15C70-DLV, LHLD6 15C70-DLV, LTD80 15
Test Date 12/16/2010

Dimmer Tested Against:	EDIMMOD		
Pass/Fail	Pass		
Best-Fit Power Profile:			
Minimum ON	1		
Maximum ON	75		
Adjust	100		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.7%		
Minimum (Perceived)	25.5%		
Minimum (Measured)	0.0%		

Linearity Curves (Best-fit Power Profile Applied):

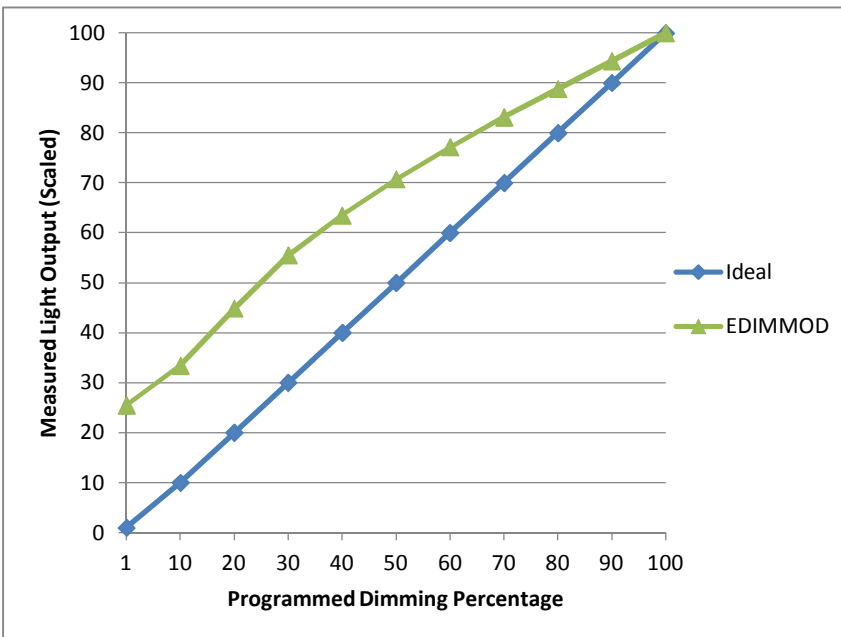

Observations:

There is a short delay (~1-3s) to turn-on at low end.