


**Manufacturer** Sunlite  
**Model** 80415/ETC/4.5W/E26/D/E/2700K  
**Description** Chandelier LED Medium Base Clear  
**Driver** integrated  
**Nominal Power (W)** 4.5  
**Dimming Control** forward- and reverse-phase  
**Product Range**  
**Test Date** 7/27/2015

Dimmer Tested Against:	SDM12-EM	EDIMMOD	
Pass/Fail	Pass	Pass	
<b>Best-Fit Power Profile:</b>			
Minimum ON	4	4	
Maximum ON	77	76	
Adjust	70	80	
<b>Light Output Range (vs. non-dimmed)</b>			
Maximum (Perceived)	96.1%	95.4%	
Minimum (Perceived)	17.7%	18.2%	
Minimum (Measured)	3.1%	3.3%	

**Linearity Curves (Best-fit Power Profile Applied):**

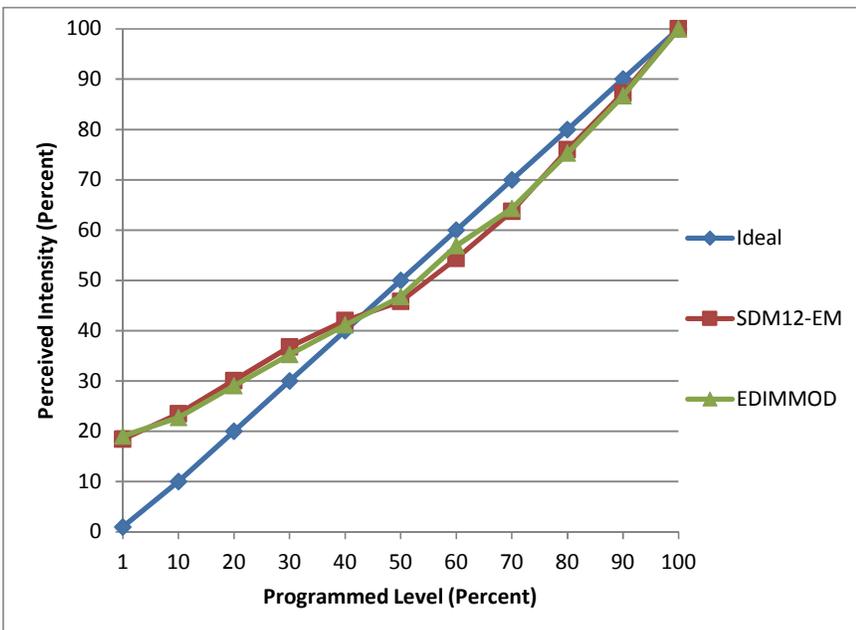

**Observations:**

Not recommended with the ScenePoint Dimmer because synchronization issues between lamps causing flicker even near full on.