Manufacturer Sylvania

Model LED6MR16/DIM/827/NFL25

Description MR16 G

Driver Integrated; combined with Juno IC44N can with magnetic transform

Nominal Power (W)


Dimming Control Forward-phase

Product Range Ultra LED

Test Date 11/7/2014

Dimmer Tested Against:	SDM12-EM	DRD4	
Pass/Fail	Pass	Pass	
Best-Fit Power Profile:		Standard	
Minimum ON	2	2	
Maximum ON	90		
Adjust	100		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived), 120V	95.7%	100.0%	
Minimum (Perceived)	11.2%	9.0%	
Minimum (Measured)	1.3%	0.8%	

Linearity Curves (Best-fit Power Profile Applied):

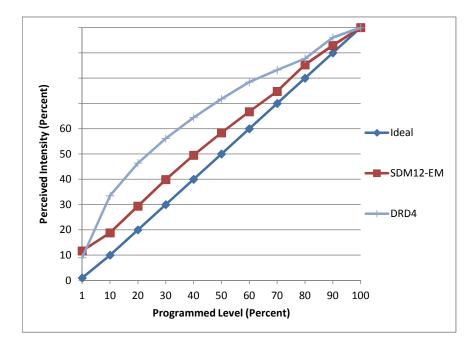

Observations: