


Manufacturer USAI
Model LRTD4-9016-C2-30KS-30-NCSM-120V-DIML3
Description Beveled 2.0 Round Trimmed Downlight
Driver Lutron Hi-Lume A LTEA4UIUKS-HC070
Nominal Power (W) 16
Dimming Control Forward-phase
Product Range
Test Date 5/22/2015

Dimmer Tested Against:	SDM12-EM		
Pass/Fail	Pass		
Best-Fit Power Profile:			
Minimum ON	5		
Maximum ON	88		
Adjust	-70		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived), 120V	97.2%		
Minimum (Perceived)	11.1%		
Minimum (Measured)	1.2%		

Linearity Curves (Best-fit Power Profile Applied):

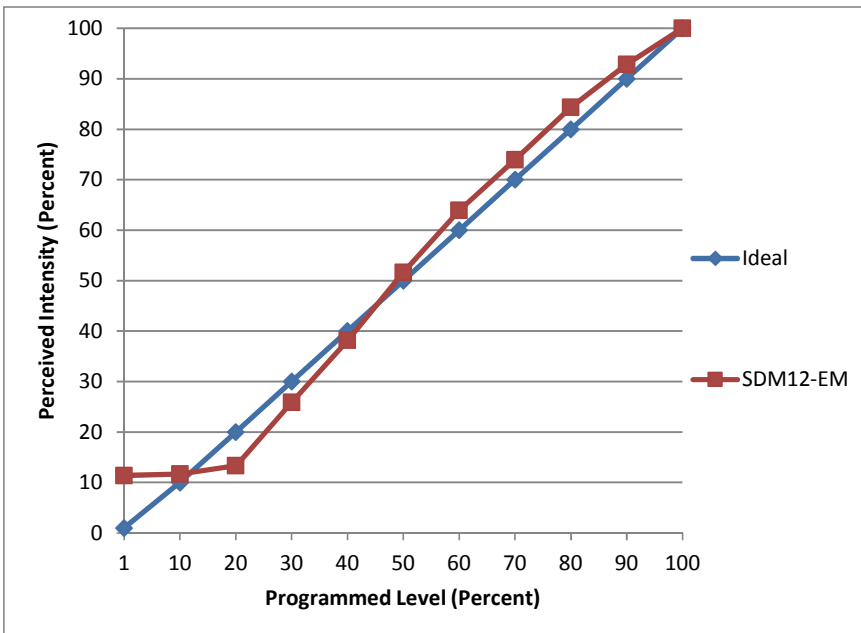

Observations:

Minimum number of fixtures per channel of SDM12-EM: 1
 Maximum number of fixtures per channel of SDM12-EM: 24