


**Manufacturer** Xicato  
**Model** XIM19803013A2A  
**Description** LEDE Module, XIM, LES19, Standard, DALI  
**Driver** integrated. External power supply Strato LED  
**Nominal Power (W)** N/A  
**Control Current** N/A  
**Dimming Control** DALI  
**Product Range** XIM  
**Test Date** 5/11/2015

|                                     |             |  |  |
|-------------------------------------|-------------|--|--|
| Dimmer Tested Against:              | DMX-DALI-GW |  |  |
| Pass/Fail                           | Pass        |  |  |
| Best-Fit Power Profile:             |             |  |  |
| Minimum ON                          | N/A         |  |  |
| Maximum ON                          | N/A         |  |  |
| Adjust                              | N/A         |  |  |
| Light Output Range (vs. non-dimmed) |             |  |  |
| Maximum (Perceived)                 | 100.0%      |  |  |
| Minimum (Perceived)                 | 3.2%        |  |  |
| Minimum (Measured)                  | 0.1%        |  |  |

Linearity Curves (Best-fit Power Profile Applied):

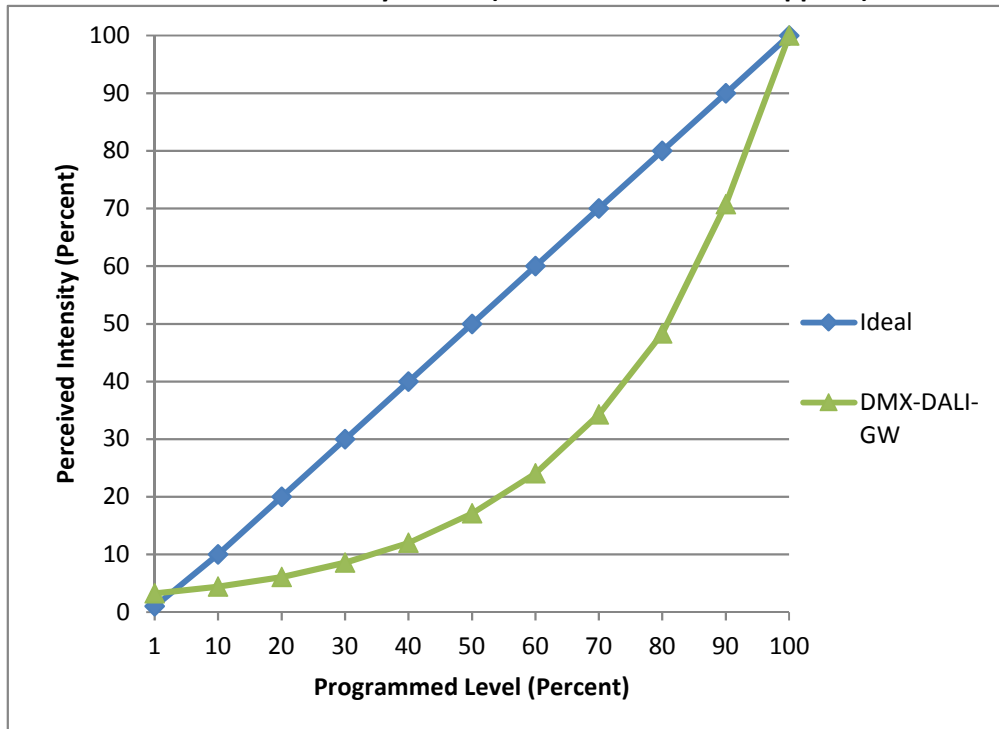

**Observations:**

There are no power profile modifications available currently for DALI.  
 The dimming curve follows the standard DALI dimming curve, which is based on the theory that human perception-to-measurement follows a logarithmic curve.  
 The "ideal" curve, as standardized upon by Vantage, differs because it is based instead on the theory of a square-law perception-to-measurement relationship.





