Manufacturer Liteline

Model G4-P20LED7W-30KFL-ES

DescriptionPAR20DriverIntegrated

Nominal Power (W) 7


Dimming Control Forward and Reverse

Product Range

Test Date 4/14/2016

Dimmer Tested Against:	SDM12-EM	UDM	ScenePoint
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			
Minimum ON	1.5	1.5	1.5
Maximum ON	95	96	96
Adjust	100	100	100
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.2%	95.2%	95.4%
Minimum (Perceived)	22.7%	18.9%	20.6%
Minimum (Measured)	5.1%	3.6%	4.3%

Linearity Curves (Best-fit Power Profile Applied):

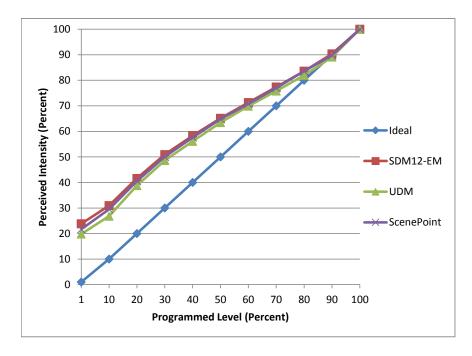

Observations:

Has buzzing while dimmed

bgk