


Manufacturer Liteline
Model G4-P38LED17W-30KFLES
Description PAR38 Lamp
Driver Integrated
Nominal Power (W) 17
Dimming Control Forward and Reverse
Product Range
Test Date 5/10/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	6	6	5	5
Maximum ON	90	91	92	89
Adjust	100	100	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.1%	95.4%	95.5%	95.3%
Minimum (Perceived)	24.6%	23.2%	19.6%	21.4%
Minimum (Measured)	6.0%	5.4%	3.9%	4.6%

Linearity Curves (Best-fit Power Profile Applied):

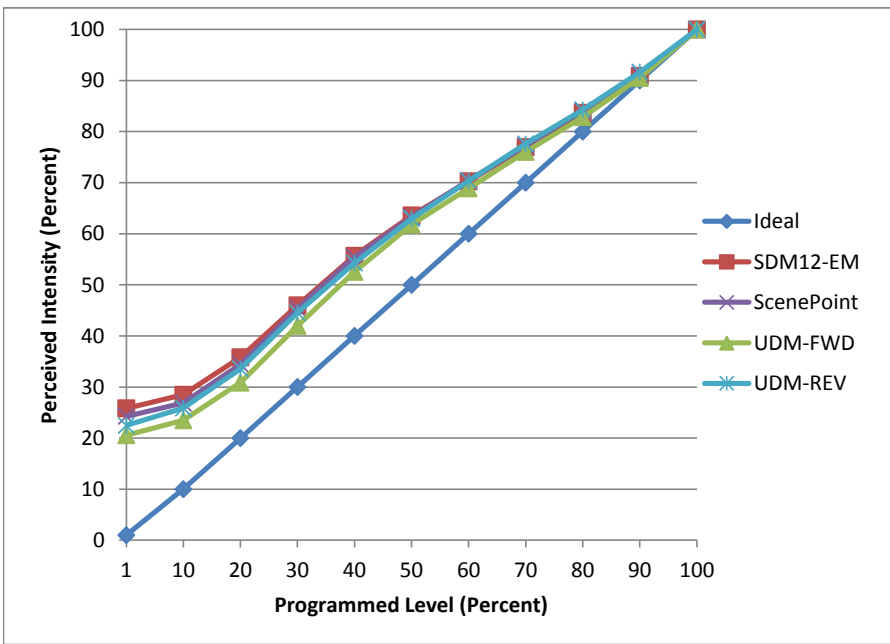

Observations:

bgk