Manufacturer NICOR

ModelDLS56-2009-120-3K-WHDescriptionSurface Mount LED Downlight

Driver integrated

Nominal Power (W) 15


Dimming Control forward- and reverse-phase

Product Range

Test Date 10/30/2015

Dimmer Tested Against:	SDM12-EM	EDIMMOD	
Pass/Fail	Pass	Pass	
Best-Fit Power Profile:			
Minimum ON	1.5	0	
Maximum ON	88	83	
Adjust	100	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.2%	95.2%	
Minimum (Perceived)	8.8%	10.6%	
Minimum (Measured)	0.8%	1.1%	

Linearity Curves (Best-fit Power Profile Applied):

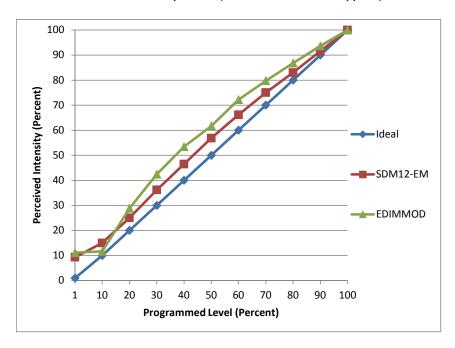

Observations:

Minimum load is not achieved with single fixture on both ScenePoint and SDM. Test results are with load resistor in place. If insufficient number of fixtures are on a load, a load resistor may be necessary in order to dim.

No flicker, from minimum load issue, but light does not dim much at all.