ManufacturerSatcoModelS9148DescriptionBR 30 LampDriverIntegratedNominal Power (W)8.5


Dimming Control Forward and Reverse

Product Range -

Test Date 9/6/2016

Dimmer Tested Against:	SDM12-EM	Scenepoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	3	3	3	3
Maximum ON	91	91	86	86
Adjust	100	100	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.4%	95.0%	95.0%	95.0%
Minimum (Perceived)	20.9%	21.2%	23.6%	23.8%
Minimum (Measured)	4.4%	4.5%	5.6%	5.7%

Linearity Curves (Best-fit Power Profile Applied):

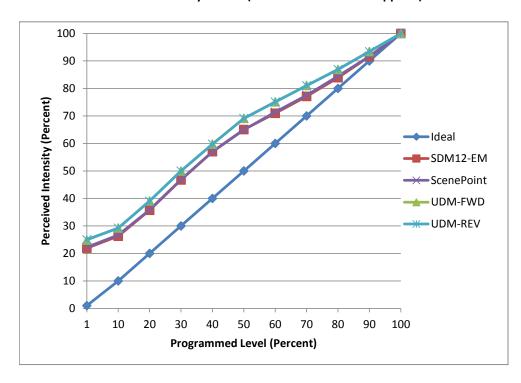

Observations: