
Manufacturer	Sylvania		
Model	LED/RT4/600/830/FL80		
Description	4" Recessed Kit		
Driver	Integrated		
Nominal Power (W)	9		
	•		
Dimming Control	Forward- and reverse-phase		
· · /	Forward- and reverse-phase ULTRA LED		

Dimmer Tested Against:	SDM12-EM	EDIMMOD	
Pass/Fail	Fail	Pass	
Best-Fit Power Profile:			
Minimum ON	2	0	
Maximum ON	88	81	
Adjust	100	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.1%	95.2%	
Minimum (Perceived)	10.0%	12.1%	
Minimum (Measured)	1.0%	1.5%	

Linearity Curves (Best-fit Power Profile Applied):

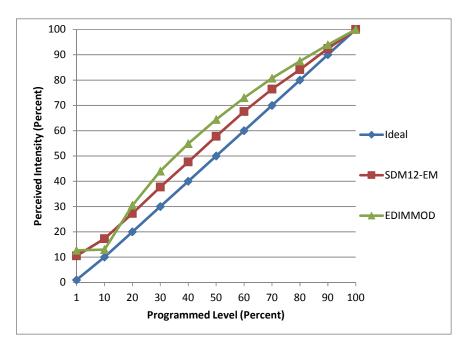

Observations:

Failed against forward-phase dimmers because without parallel load, will not dim smoothly, rather has a sudden jump in level. The curve shown should generally be ignored, as it was achieved by paralleling resistive load.