


Manufacturer WAC Lighting
Model DR-LED302
Description LED Globe Light
Driver WAC Lighting EN-24100-RB2
Nominal Power (W)
Dimming Control reverse-phase
Product Range LED Beauty Spot
Test Date 10/5/2015

Dimmer Tested Against:	EDIMMOD		
Pass/Fail	Fail		
Best-Fit Power Profile:			
Minimum ON	8		
Maximum ON	20		
Adjust	100		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	96.2%		
Minimum (Perceived)	53.7%		
Minimum (Measured)	28.9%		

Linearity Curves (Best-fit Power Profile Applied):

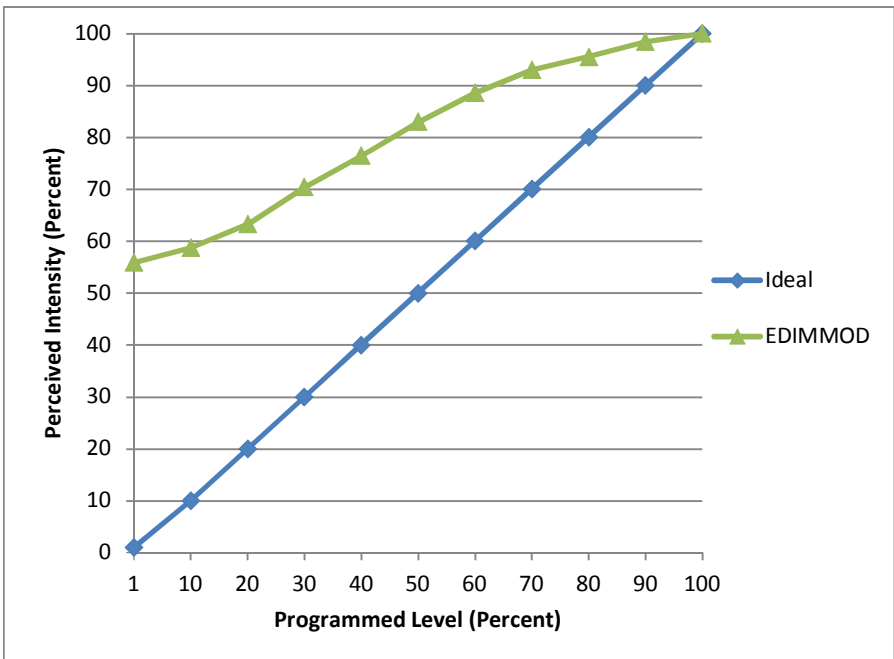

Observations:

Failed due to two issues:

1. sensitive to minor power fluctuations, causing highly-observable flicker in bottom half of dimming range.
2. even with steady power, flickers at low end. Here the dimming curve shows the high dimming floor resulting from eliminating the flickering low end.