


**Manufacturer** CREE  
**Model** DRDL6-06227009-12DE26-1C\_00 or DR6-625L-27K-12-E26  
**Description** 6" Can insert  
**Driver** integrated  
**Nominal Power (W)** 12.5  
**Dimming Control** forward- and reverse-phase  
**Product Range**  
**Test Date** 10/6/2015

Dimmer Tested Against:	SDM12-EM	EDIMMOD	
Pass/Fail	Pass	Pass	
<b>Best-Fit Power Profile:</b>			
Minimum ON	0.5	0.5	
Maximum ON	78	70	
Adjust	100	100	
<b>Light Output Range (vs. non-dimmed)</b>			
Maximum (Perceived)	95.0%	95.4%	
Minimum (Perceived)	5.1%	17.1%	
Minimum (Measured)	0.3%	2.9%	

Linearity Curves (Best-fit Power Profile Applied):

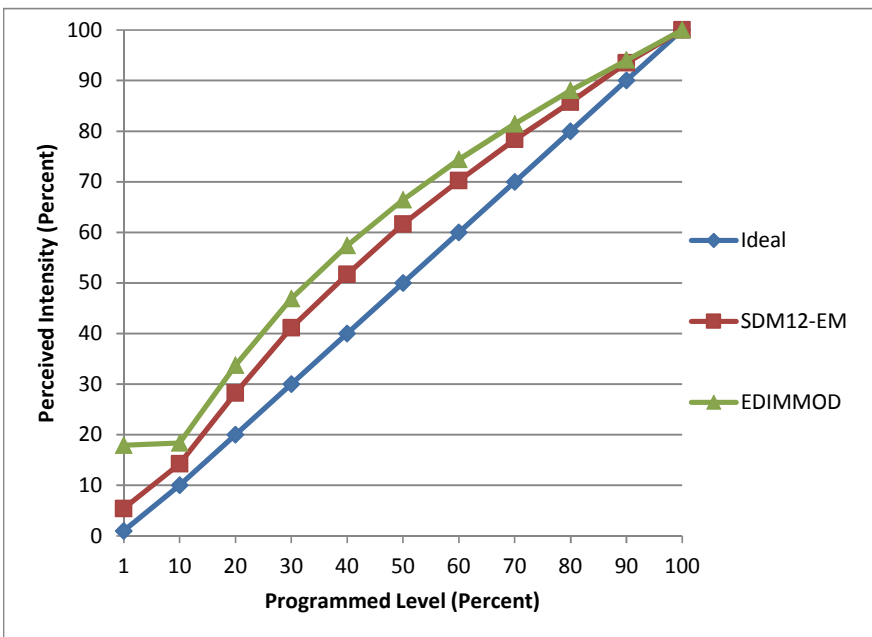

Observations: