


Manufacturer Contrast Lighting
Model LD3BC-113090W2
Description 3 1/2" LED Downlight, square adjustable trim
Driver Magtech M18-U36-0500
Nominal Power (W)
Dimming Control Reverse-phase
Product Range Concerto LED
Test Date 2/17/2015

Dimmer Tested Against:	EDIMMOD		
Pass/Fail	Pass		
Best-Fit Power Profile:			
Minimum ON	5		
Maximum ON	85		
Adjust	100		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.5%		
Minimum (Perceived)	15.5%		
Minimum (Measured)	2.4%		

Linearity Curves (Best-fit Power Profile Applied):

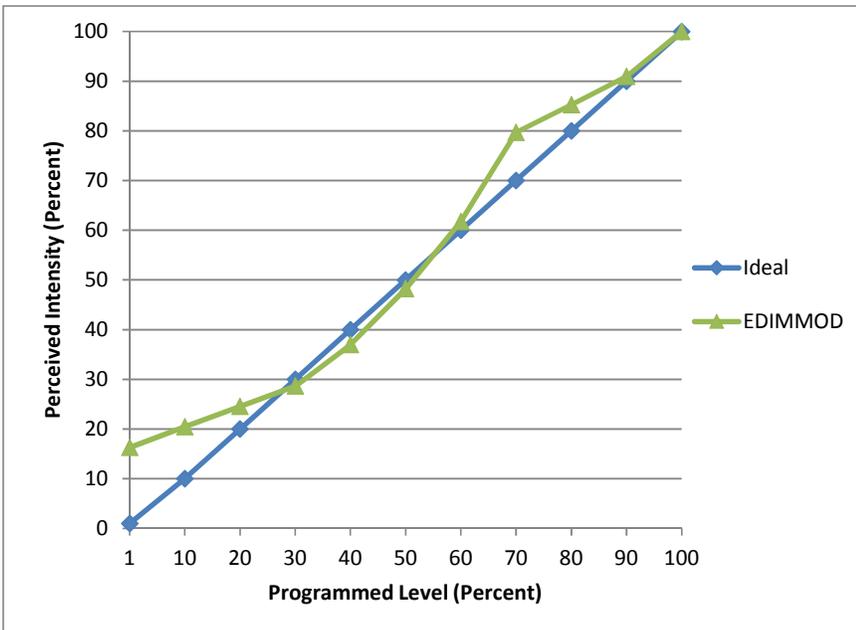

Observations: