


**Manufacturer** Contrast Lighting  
**Model** NWLD3000LE1 housing; LD3DC02022780W2 trim  
**Description** 2" Downlight  
**Driver** Magtech M18-U36-0500(ELV)  
**Nominal Power (W)**  
**Dimming Control** reverse-phase  
**Product Range**  
**Test Date** 1/6/2015

Dimmer Tested Against:	<b>EDIMMOD</b>		
Pass/Fail	Pass		
<b>Best-Fit Power Profile:</b>			
Minimum ON	13		
Maximum ON	84		
Adjust	100		
<b>Light Output Range (vs. non-dimmed)</b>			
Maximum (Perceived)	95.1%		
Minimum (Perceived)	24.0%		
Minimum (Measured)	5.8%		

**Linearity Curves (Best-fit Power Profile Applied):**

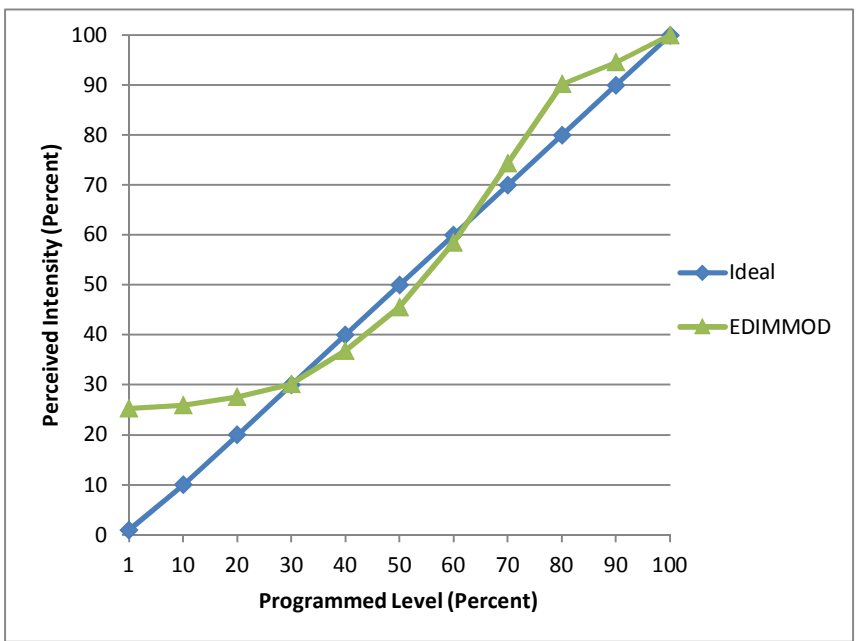

**Observations:**

Starting low or with ramp may produce a flash or two at start, not corrected significantly by raising the Minimum ON.