


Manufacturer FX Luminaire
Model NP-3LED-BZ NuitParenaire
Description LED Landscape uplight
Driver Combined with PX Transformer from LX Luminaire
Nominal Power (W) 4.5
Dimming Control Forward-phase
Product Range
Test Date 4/13/2015

| | | | |
|--|-----------------|--|--|
| Dimmer Tested Against: | SDM12-EM | | |
| Pass/Fail | pass | | |
| Best-Fit Power Profile: | | | |
| Minimum ON | 4 | | |
| Maximum ON | 85 | | |
| Adjust | 100 | | |
| Light Output Range (vs. non-dimmed) | | | |
| Maximum (Perceived), 120V | 95.9% | | |
| Minimum (Perceived) | 17.9% | | |
| Minimum (Measured) | 3.2% | | |

Linearity Curves (Best-fit Power Profile Applied):

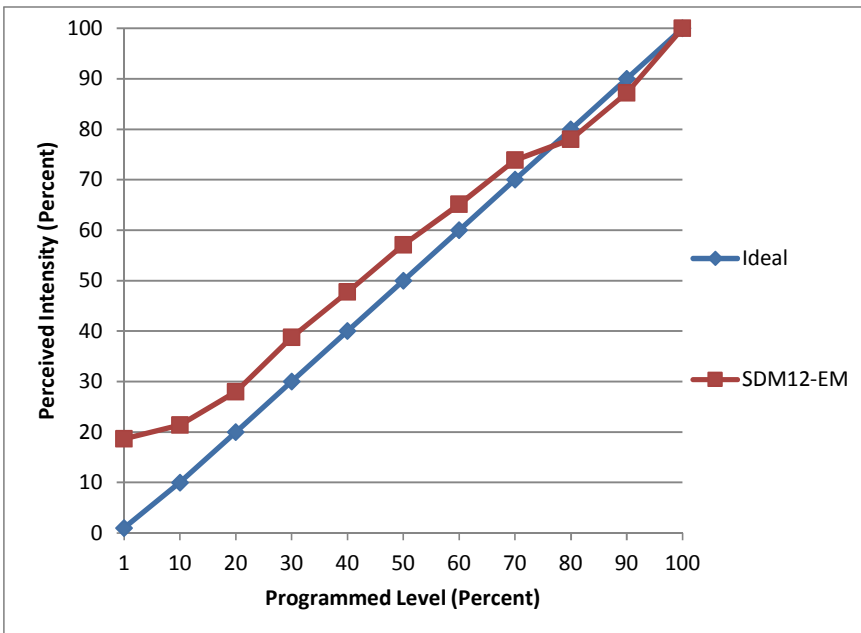

Observations: