


Manufacturer FX Luminaire
Model P-1LED-12RA-BZ
Description LED Pathlight
Driver Combined with PX Transformer from LX Luminaire
Nominal Power (W) 2.4
Dimming Control Forward-phase
Product Range
Test Date 4/13/2015

Dimmer Tested Against:	SDM12-EM		
Pass/Fail	pass		
Best-Fit Power Profile:			
Minimum ON	13		
Maximum ON	80		
Adjust	100		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived), 120V	95.2%		
Minimum (Perceived)	39.6%		
Minimum (Measured)	15.7%		

Linearity Curves (Best-fit Power Profile Applied):

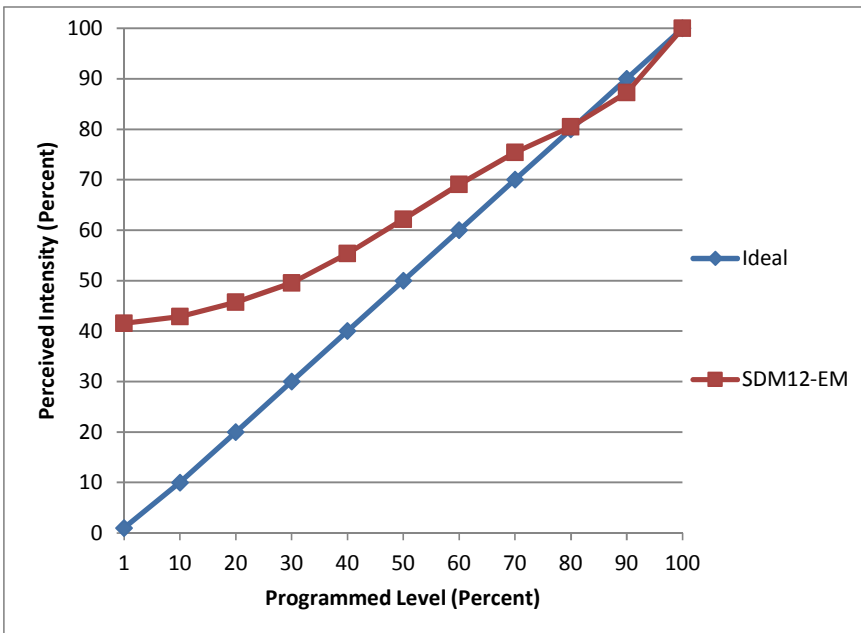

Observations: