


Manufacturer Halo
Model RA406927NFLWH
Description 4" Downlight Retrofit - Adjustable Gimbal
Driver XEL-014PAL-CX240-035-TNA01
Nominal Power (W) 10
Dimming Control forward- and reverse-phase
Product Range Halo LED Retrofit Collection - RA Series
Test Date 2/12/2015

Dimmer Tested Against:	SDM12-EM	EDIMMOD	ScenePoint
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			
Minimum ON	1.5	4	1.5
Maximum ON	85	62	85
Adjust	60	100	60
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.7%	95.2%	95.5%
Minimum (Perceived)	5.4%	31.7%	4.9%
Minimum (Measured)	0.3%	10.1%	0.2%

Linearity Curves (Best-fit Power Profile Applied):

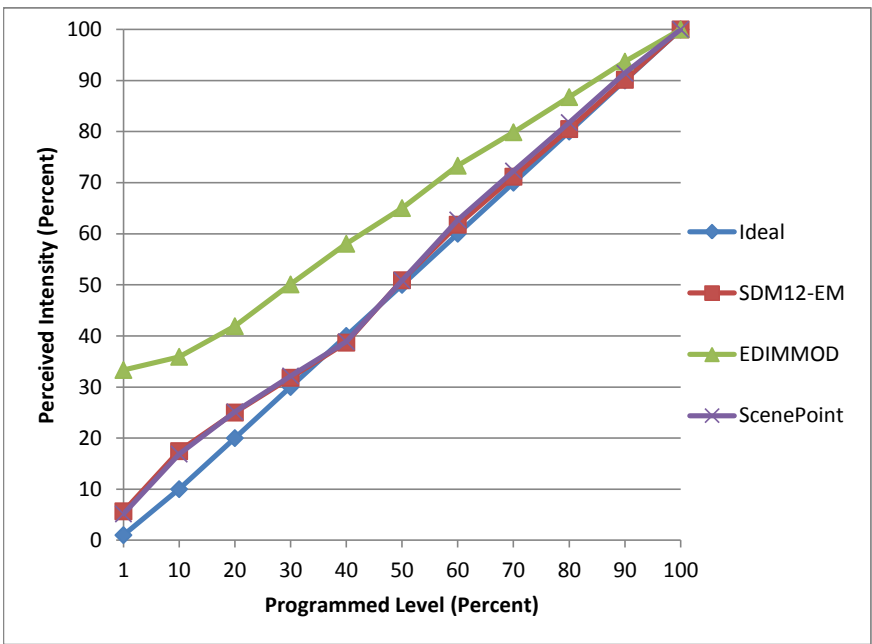

Observations: