


**Manufacturer** LEDnovation  
**Model** LED-MR16-50-12-27D-INF  
**Description** MR16 LED Lamp  
**Driver** Internal. Transformers: LightTech LET75 reverse-phase; Juno magnetic forward phase  
**Nominal Power (W)** 7.9  
**Dimming Control** Forward- and Reverse-Phase  
**Product Range**  
**Test Date** 12/13/2012

Dimmer Tested Against:	SDM12-EM	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Standard
Minimum ON	1	2	7
Maximum ON	90	80	
Adjust	100	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	96.0%	96.3%	100.0%
Minimum (Perceived)	12.5%	23.0%	27.1%
Minimum (Measured)	1.6%	5.3%	7.3%

Linearity Curves (Best-fit Power Profile Applied):

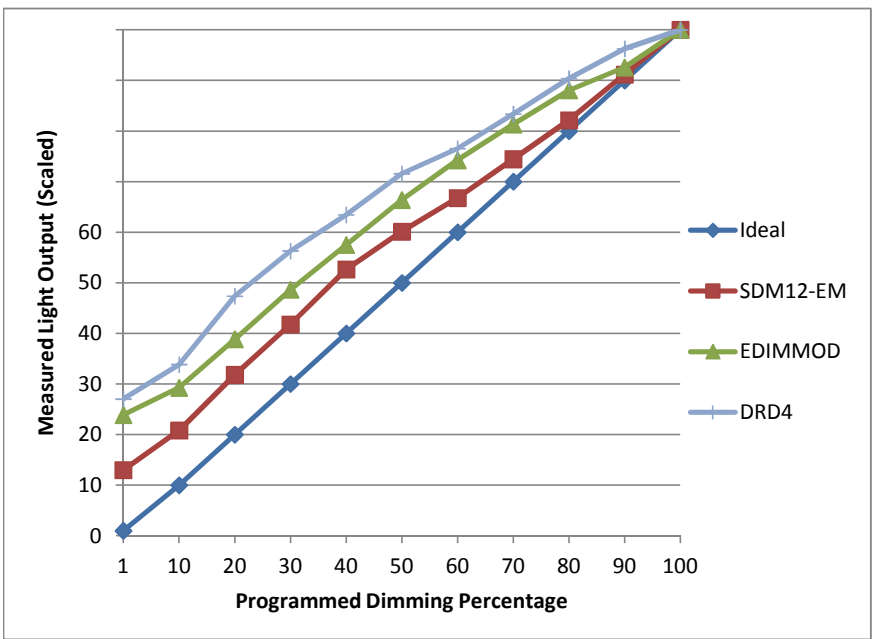

Observations: None