


Manufacturer LEDnovation
Model LED-PAR30S-75-1WD-INFE
Description PAR30 LED Lamp
Driver Internal
Nominal Power (W) 15.6
Dimming Control Forward- and Reverse-Phase
Product Range
Test Date 12/5/2012

Dimmer Tested Against:	SDM12-EM	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Standard
Minimum ON	3	1	4
Maximum ON	75	45	
Adjust	90	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	94.8%	95.5%	100.0%
Minimum (Perceived)	2.0%	5.8%	1.4%
Minimum (Measured)	0.0%	0.3%	0.0%

Linearity Curves (Best-fit Power Profile Applied):

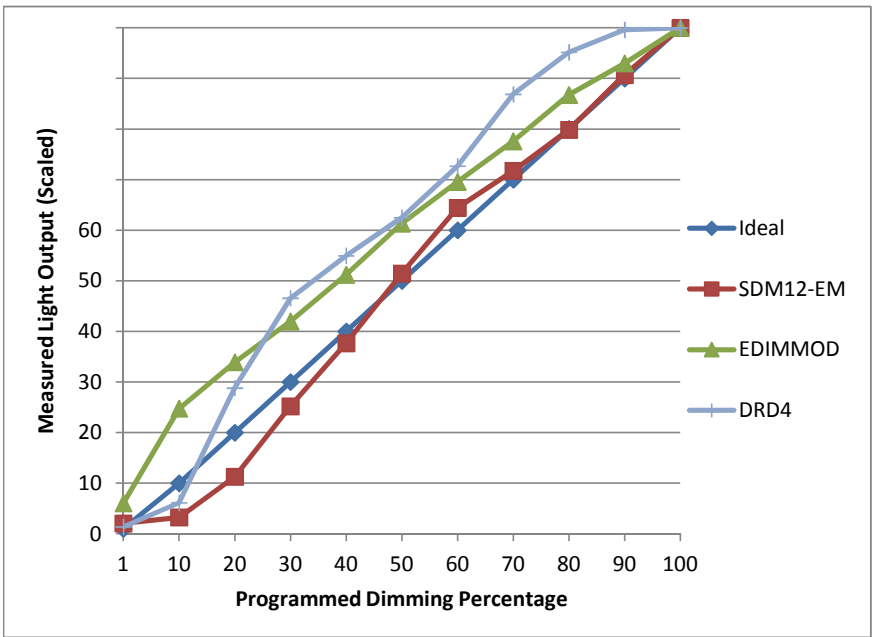

Observations: None

Forward-phase
100% Dim Level Waveform Capture



50% Dim Level Waveform Capture



Reverse-phase
100% Dim Level Waveform Capture



50% Dim Level Waveform Capture

