


Manufacturer Lightolier
Model 1050
Description 5" LED Downlight
Driver Integrated
Nominal Power (W)
Dimming Control Reverse-phase
Product Range XCEED
Test Date 5/31/2013


Dimmer Tested Against:	EDIMMOD		
Pass/Fail	Pass		
Best-Fit Power Profile:			
Minimum ON	0.1		
Maximum ON	77		
Adjust	100		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.6%		
Minimum (Perceived)	28.9%		
Minimum (Measured)	8.3%		

Reverse-phase


100% Dim Level Waveform Capture

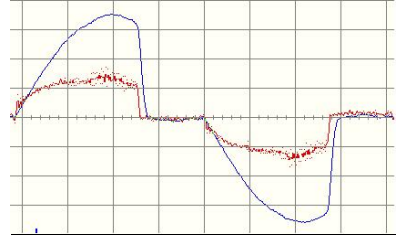

50% Dim Level Waveform Capture

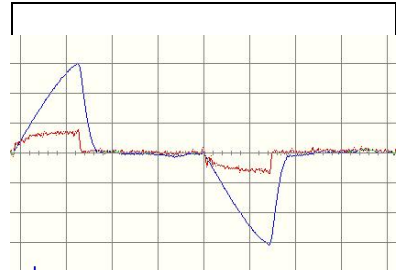

Linearity Curves (Best-fit Power Profile Applied):

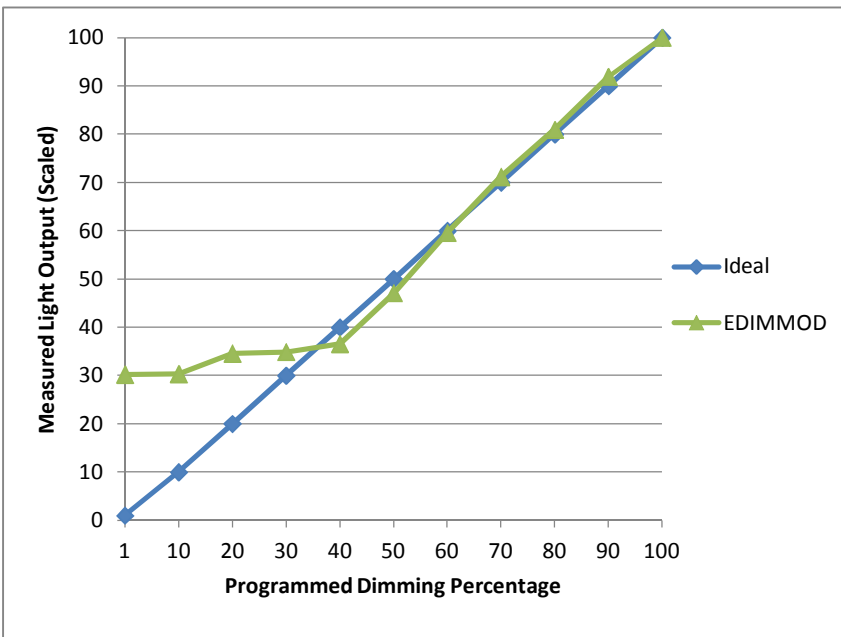

Observations: Some minor flicker observable at various points throughout the dimming range. Occasional strobing also observed.