


Manufacturer Nora
Model NRM-411L85CDWW
Description 4" Downlight -fixed
Driver CREE LMD125-0018C440-1010000
Nominal Power (W) 8.76
Dimming Control forward- and reverse-phase
Product Range Marquise
Test Date 1/8/2015

Dimmer Tested Against:	SDM12-EM	EDIMMOD	
Pass/Fail	Fail	Pass	
Best-Fit Power Profile:			
Minimum ON	0	0	
Maximum ON	55	47	
Adjust	100	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.6%	95.3%	
Minimum (Perceived)	7.0%	16.2%	
Minimum (Measured)	0.5%	2.6%	

Linearity Curves (Best-fit Power Profile Applied):

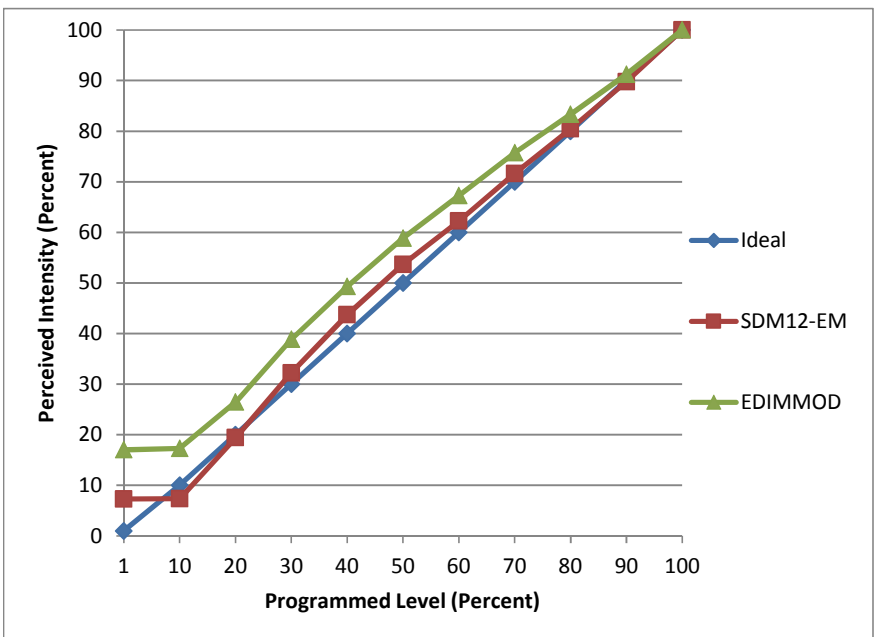

Observations:

Forward-phase, strobos around the 70-80% range and remains low-color-temp (rather than white) in dim levels above or below when strobing ceases
 Issue goes away when not grounded.