


Manufacturer Philips
Model 10GM6DAAAEBBA
Description MR16
Driver Internal. Used Ambiance 9454-12 for electronic transformer
Nominal Power (W) 13
Dimming Control Forward- and reverse-phase (transformer-dependent)
Product Range
Test Date 6/7/2011

Dimmer Tested Against:	MDS8RW101	EDIMMOD	DRD4
Pass/Fail	not tested	Pass	not tested
Best-Fit Power Profile:			
Minimum ON		6	
Maximum ON		40	
Adjust		100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	100.0%	98.6%	100.0%
Minimum (Perceived)	1.0%	32.2%	1.0%
Minimum (Measured)	0.0%	10.3%	0.0%

Linearity Curves (Best-fit Power Profile Applied):

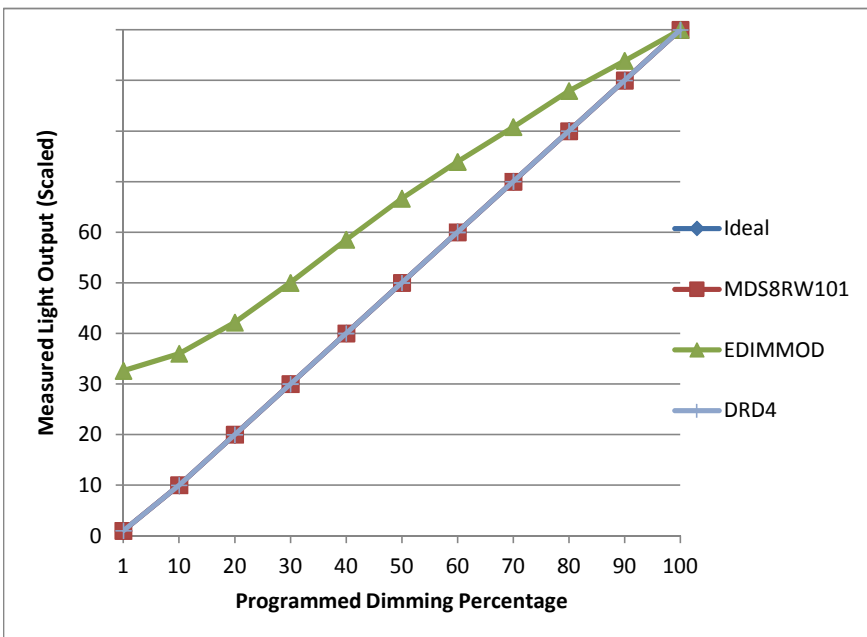

Observations:

Flicker noticeable throughout bottom half of dimming range, dependant on transformer and low load conditions
 Minimum reliable on level for DRD4 is 10%.