


**Manufacturer** Philips  
**Model** 13E26B30DAAABAA  
**Description** AmbientLED BR30 Replacement  
**Driver** Internal  
**Nominal Power (W)** 13  
**Dimming Control**  
**Product Range**  
**Test Date** 6/7/2011

Dimmer Tested Against:	MDS8RW101	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Standard
Minimum ON	4	2	6
Maximum ON	70	68	
Adjust	95	95	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	96.9%	96.8%	100.0%
Minimum (Perceived)	23.4%	20.5%	20.6%
Minimum (Measured)	5.5%	4.2%	4.2%

Linearity Curves (Best-fit Power Profile Applied):

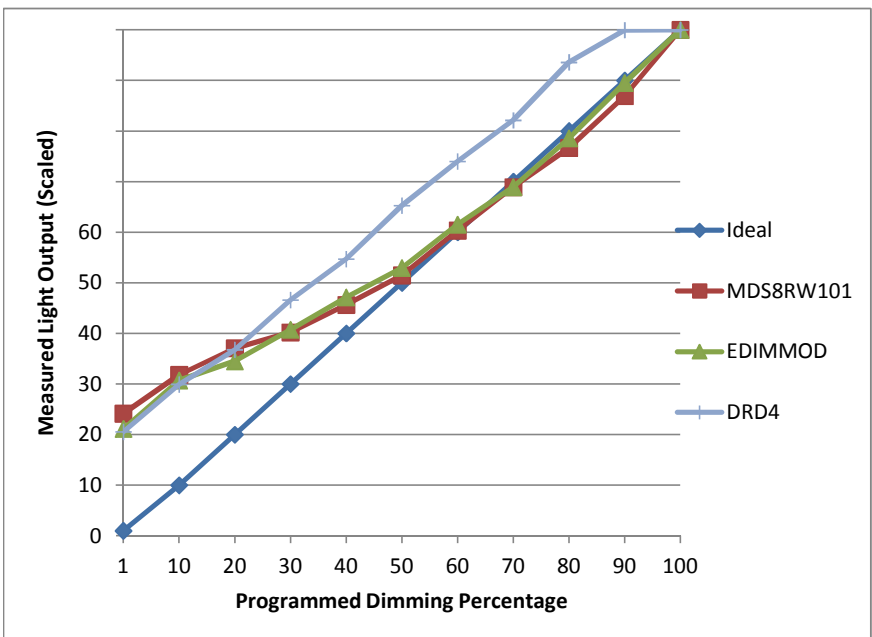

**Observations:**

Visible light level stepping occurs as sample is dimmed.