


**Manufacturer** Philips  
**Model** 7E26PAR20D-I  
**Description** PAR 20 Lamp  
**Driver** Integrated  
**Nominal Power (W)** 7  
**Dimming Control** Forward and Reverse  
**Product Range** -  
**Test Date** 6/23/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
<b>Best-Fit Power Profile:</b>				
Minimum ON	3	3	3	3
Maximum ON	25	28	28	19
Adjust	-25	-25	-25	-25
<b>Light Output Range (vs. non-dimmed)</b>				
Maximum (Perceived)	96.8%	96.2%	96.4%	94.9%
Minimum (Perceived)	5.8%	3.2%	3.4%	4.1%
Minimum (Measured)	0.3%	0.1%	0.1%	0.2%

Linearity Curves (Best-fit Power Profile Applied):

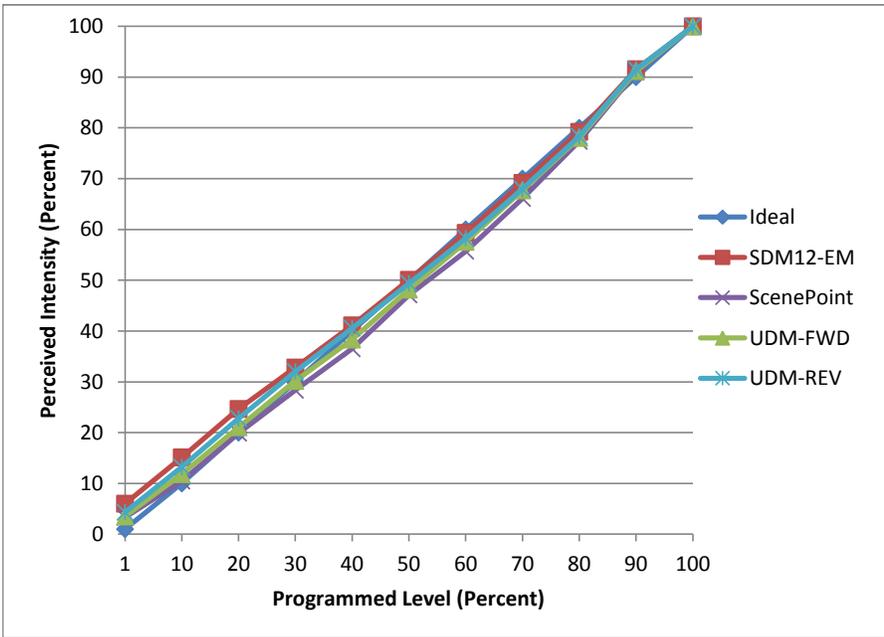

**Observations:**

bgk