


Manufacturer Solais
Model LR38-25-30K-1600-BK
Description LR38 Lamp
Driver Integrated
Nominal Power (W) 22
Dimming Control Forward and Reverse
Product Range -
Test Date 11/3/2016

Dimmer Tested Against:	SDM12-EM	Scenepoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	1	1	1	1
Maximum ON	64	66	65	64
Adjust	35	30	30	30
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.5%	95.0%	95.3%	95.6%
Minimum (Perceived)	1.7%	1.8%	1.6%	1.5%
Minimum (Measured)	0.0%	0.0%	0.0%	0.0%

Linearity Curves (Best-fit Power Profile Applied):

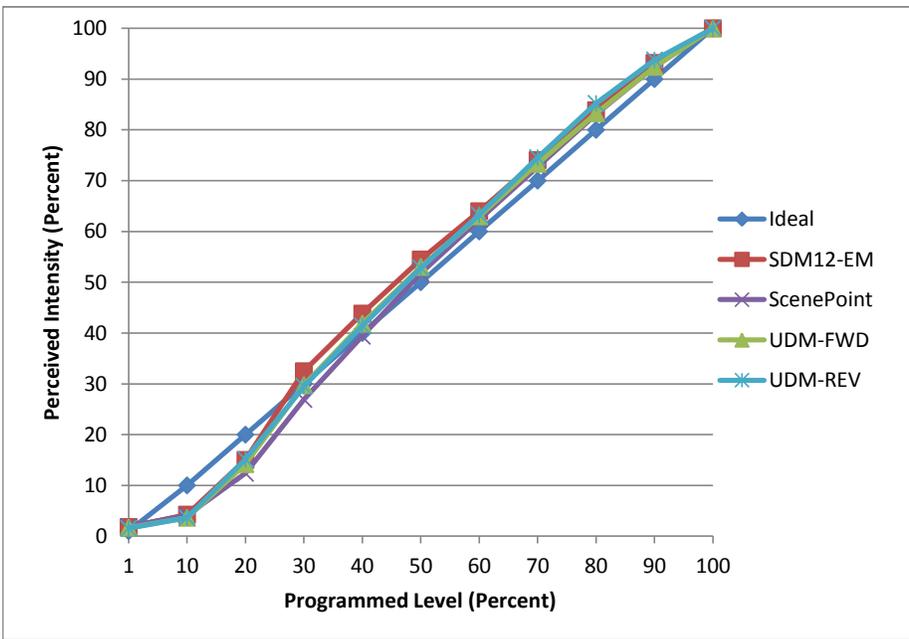

Observations:

bgk