


Manufacturer Soraa
Model MR16-50-B01-12-930-10
Description MR16 Lamp
Driver Juno IC44N
Nominal Power (W) 7.5
Dimming Control Forward and Reverse
Product Range
Test Date 5/6/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			
Minimum ON	2	7	5
Maximum ON	76	76	79
Adjust	100	100	100
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.2%	95.0%	95.2%
Minimum (Perceived)	17.9%	28.3%	28.1%
Minimum (Measured)	3.2%	8.0%	7.9%

Linearity Curves (Best-fit Power Profile Applied):

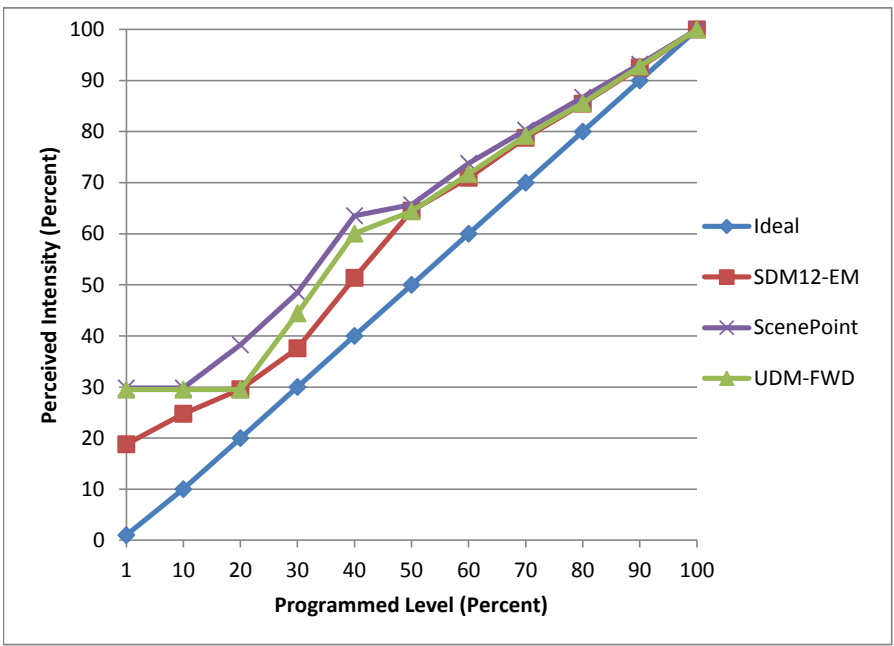

Observations:

bgk