


Manufacturer Soraa
Model MR16-75-B01-12-830-25
Description MR16 Lamp
Driver Juno IC44N
Nominal Power (W) 7.5
Dimming Control Forward and Reverse
Product Range
Test Date 5/9/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			
Minimum ON	5	5	5
Maximum ON	75	76	76
Adjust	100	100	100
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.1%	95.2%	95.0%
Minimum (Perceived)	28.1%	28.0%	28.1%
Minimum (Measured)	7.9%	7.8%	7.9%

Linearity Curves (Best-fit Power Profile Applied):

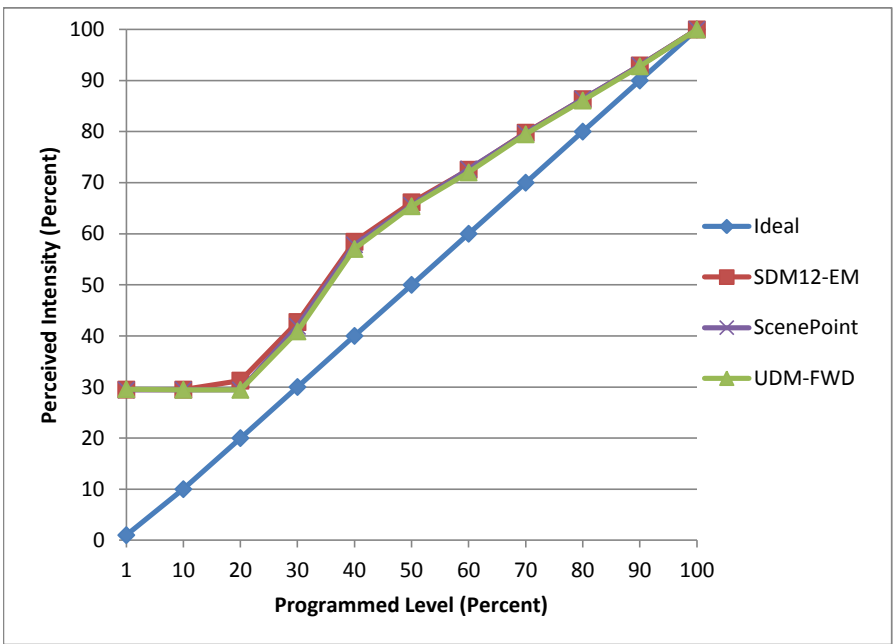

Observations:

bgk