


Manufacturer Utilitech
Model DLS02-04A27DE-WH-F2
Description 4" Recessed Retrofit Downlight
Driver JW02-011-D-036-I-N
Nominal Power (W) 11
Dimming Control forward-phase
Product Range
Test Date 10/2/2015

Dimmer Tested Against:	SDM12-EM	EDIMMOD	
Pass/Fail	Pass	Fail	
Best-Fit Power Profile:			
Minimum ON	14		
Maximum ON	95		
Adjust	60		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	94.9%	95.0%	
Minimum (Perceived)	12.6%	1.0%	
Minimum (Measured)	1.6%	0.0%	

Linearity Curves (Best-fit Power Profile Applied):

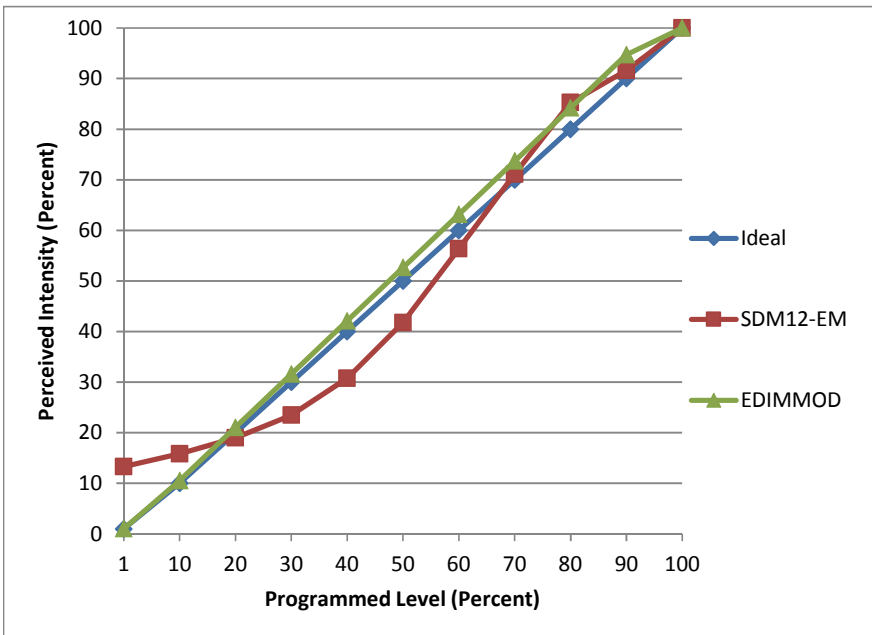

Observations:

directionally dependent light output - values given are averages
 There is a shimmer in the 20% range that caused the fail assessment in reverse phase